


"TP19" SERIES

Description: **Roof Exhaust Unit**





Type of material: ABS/PC alloy and aluminium
Standard colour: RAL 7035 - other colours on request
Protection degree: IP24, according to EN 60529 standard
Fixing method: By No 8 Ø4x16 mm screws for thermoplastic material
Plate thickness: any
Storage temperature: from -20°C to +60°C
Motor Lifetime L10 at 25°C 80%RH (approx.): 115V 75,000h 50Hz; 80,000h 60Hz
 230V 59,000h 50Hz; 73,000h 60Hz
Working class of capacitor: class B
Motor protection: thermal
Electrical connection: by terminal block 3 poles L-N-PE
Earth connection: (by terminal block, PE pole)
Appliance class: class I
Weight: 2 Kg
Approvals: CE

technical drawing

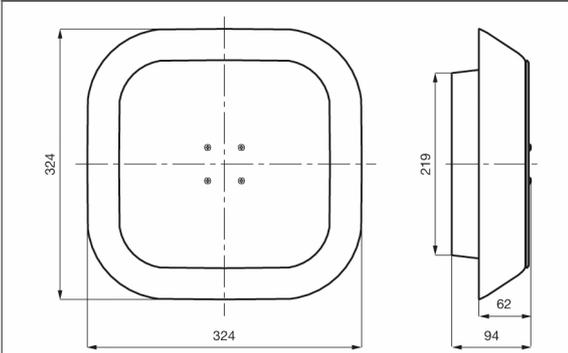

mounting cut-out

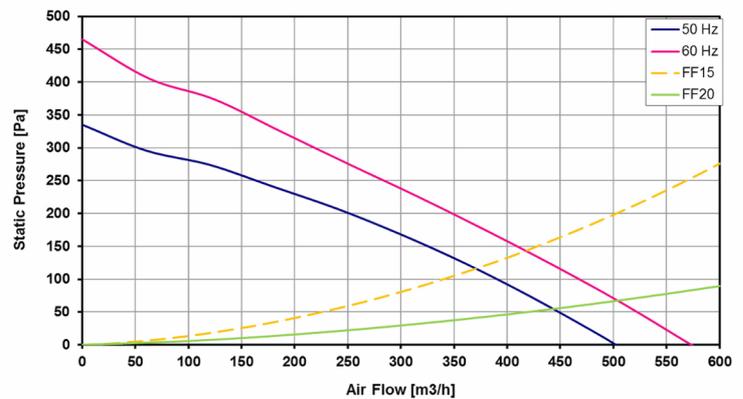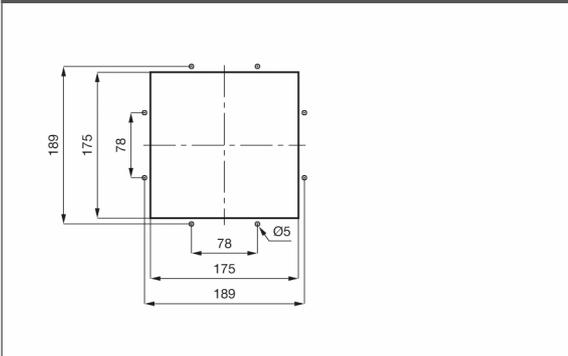

Model	Voltage (V)	Frequency (Hz)	Rated Current (A)	Rated Power (W)	Max Air Flow** (m3/h)	Static Pressure (Pa)	Fan Noise [db(A)]	Rated Temp. Range (°C)	Approvals
TP19U115B	115 V a.c.	50/60	0.55/0.65	62/75	500/575	335/465	67.9/71.0	-10 - +60	CE
TP19U230B	230 V a.c.	50/60	0.307/0.361	67/83	500/575	335/465	67.9/71.0	-10 - +60	CE

(*) data with uncertainty of 10%

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.