


**"TP19\_IP54" SERIES**

Description: **Roof Exhaust Unit IP54**





**Type of material:** ABS/PC alloy and aluminium  
**Standard colour:** RAL 7035 - other colours on request  
**Protection degree:** IP54, according to EN 60529 standard  
**Fixing method:** By No 8 Ø4x16 mm screws for thermoplastic material  
**Plate thickness:** any  
**Storage temperature:** from -20°C to +60°C  
**Motor Lifetime L10 at 25°C 80%RH (approx.):** 115V 75,000h 50Hz; 80,000h 60Hz  
 230V 59,000h 50Hz; 73,000h 60Hz  
**Working class of capacitor:** class B  
**Motor protection:** thermal  
**Electrical connection:** by terminal block 3 poles L-N-PE  
**Earth connection:** (by terminal block, PE pole)  
**Appliance class:** class I  
**Approvals:** CE  
**Filtering class:** class G2 more metallic net according to EN 779  
**Degree of separation:** 67% - DIN 24185 (without net)  
**Dust retention capacity:** 380 g/m<sup>2</sup>  
**Note:** filter media is washable about 10 times  
**Weight:** 2.1 Kg

technical drawing

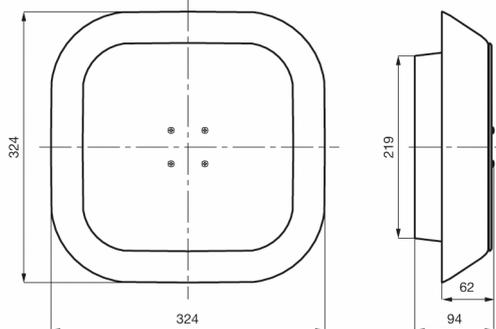

mounting cut-out

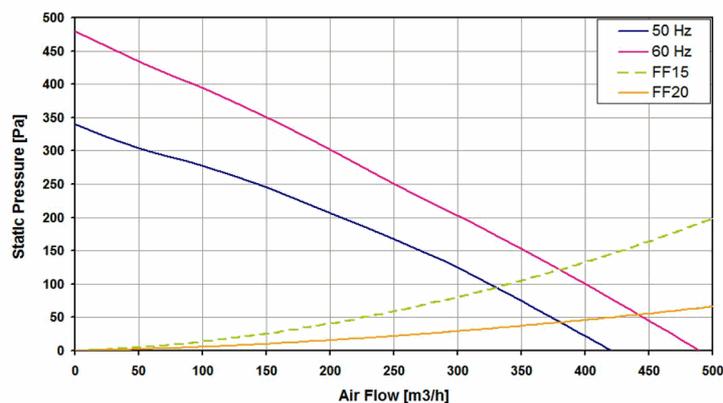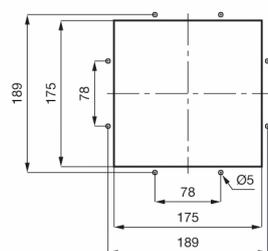

Model	Voltage (V)	Frequency (Hz)	Rated Current (A)	Rated Power (W)	Max Air Flow** (m <sup>3</sup> /h)	Static Pressure (Pa)	Fan Noise [db(A)]	Rated Temp. Range (°C)	Approvals
TP19U115B54	115 V a.c.	50/60	0.62/0.64	66/74	420/490	340/480	67.9/71.0	-10 - +60	CE
TP19U230B54	230 V a.c.	50/60	0.309/0.360	70/83	420/490	340/480	67.9/71.0	-10 - +60	CE

data with uncertainty of 10%

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.