



Product designation

SM1P

Product type designation

Motor protective
circuit breaker

Electrical features

Number of poles	nr.	3
Magnetic protection		Yes
Thermal protection		Yes
Phase failure detection		Yes
Rated insulation voltage U_i	V	690
Rated impulse withstand voltage U_{imp}	kV	6
Rated frequency	Hz	50/60
Thermal trip adjustment range		13...18
Rated current (I_n)	A	18
Magnetic tripping		13 x I_n

Operational short-circuit current breaking capacity (I_{cs}) at AC

230V	kA	50
400V	kA	13
440V	kA	5
500V	kA	5
690V	kA	3

Maximum short-circuit current breaking capacity (I_{cu}) at AC

230V	kA	100
400V	kA	25
440V	kA	10
500V	kA	10
690V	kA	3

Operations

Mechanical life	Cycles	100,000
Electrical life	Cycles	100,000

Mechanical features

Tightening torque for terminals

min	Nm	3
max	Nm	3
min	lbft	2
max	lbft	2

max number of wires simultaneously connectable

nr. 2

Conductor section

AWG

min	16
max	8

Flexible w/o lug conductor section



min	mm ²	1
max	mm ²	10

Flexible c/w lug conductor section



min	mm ²	1
-----	-----------------	---

		max	mm ²	10
Flexible with insulated spade lug conductor section				
		min	mm ²	1
		max	mm ²	10
Screwdriver				PH2
Power terminal protection according to IEC/EN 60529				IP20
Cable stripping lenght				
	main circuit	mm		1
Ambient conditions				
Temperature				
Operating temperature				
		min	°C	-20
		max	°C	60
Storage temperature				
		min	°C	-50
		max	°C	80
Compensation temperature				
		min	°C	-20
		max	°C	50
Max altitude			m	3,000
Operating position				
	normal allowable			Su piano verticale Qualsiasi
Mounting				A vite / profilato omega 35mm
Weight			g	350
UL technical data				
UL508 / UL60947-4-1 Manual Motor Controller - Short circuit current				
Motor Disconnect				
	at 240V	kA		30
	at 480V	kA		30
	protection			100A class J
Group Motor Installation				
	at 240V	kA		30
	at 480V	kA		30
	protection			100A class J
Tap Conductor Protection				
	at 480Y/277V	kA		50
	at 600Y/347V	kA		50
UL508 / UL 60947-4-1 Manual Self Protected Combination Motor Controller (Type E) Short circuit current				
	at 240V	kA		50
	at 480Y/277V	kA		50
	at 600Y/347V	kA		50
Maximum UL/CSA horsepower ratings single-phase				
	at 110V-120V	hp		1
	at 220V-240V	hp		2
Maximum UL/CSA horsepower ratings three-phase, 3-pole				
	at 200V-208V	hp		3
	at 220V-240V	hp		3
	at 440V-480V	hp		10
	at 550V-600V	hp		-

Dimensions

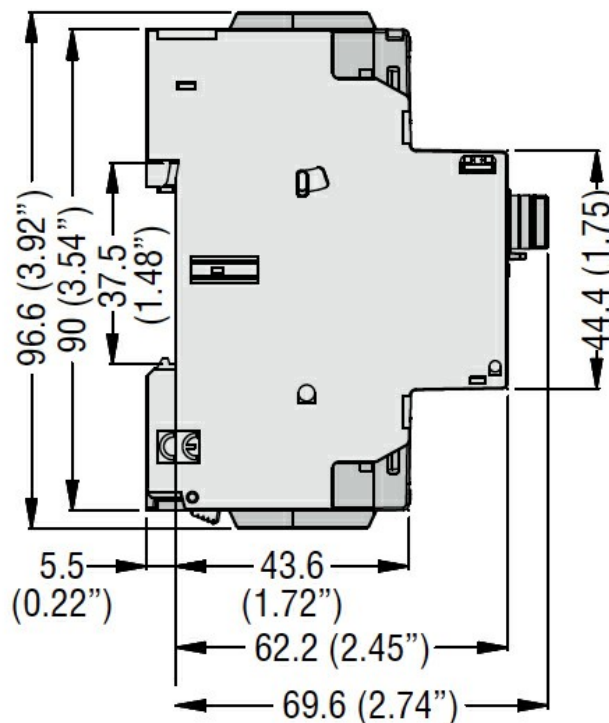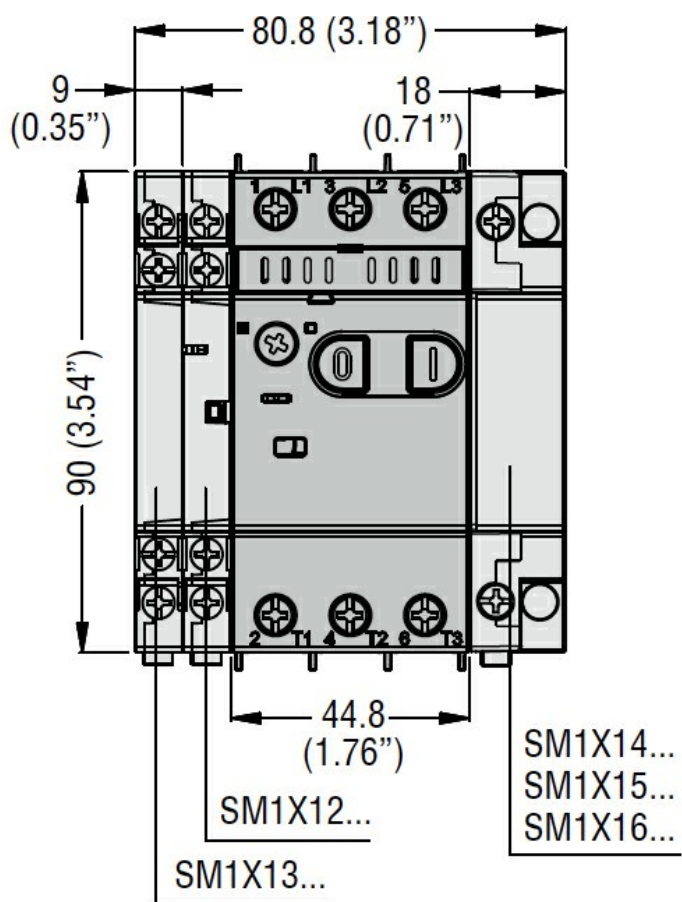

Wiring diagrams

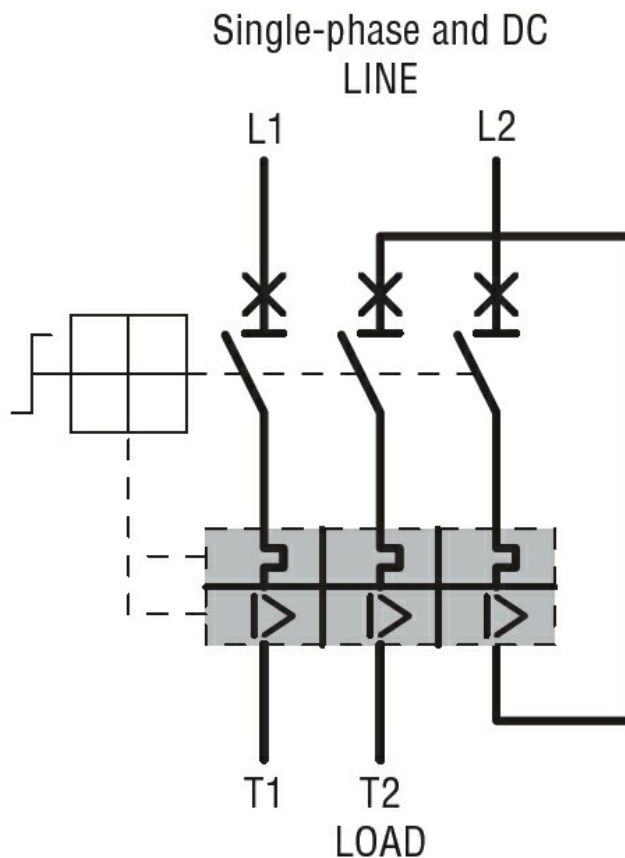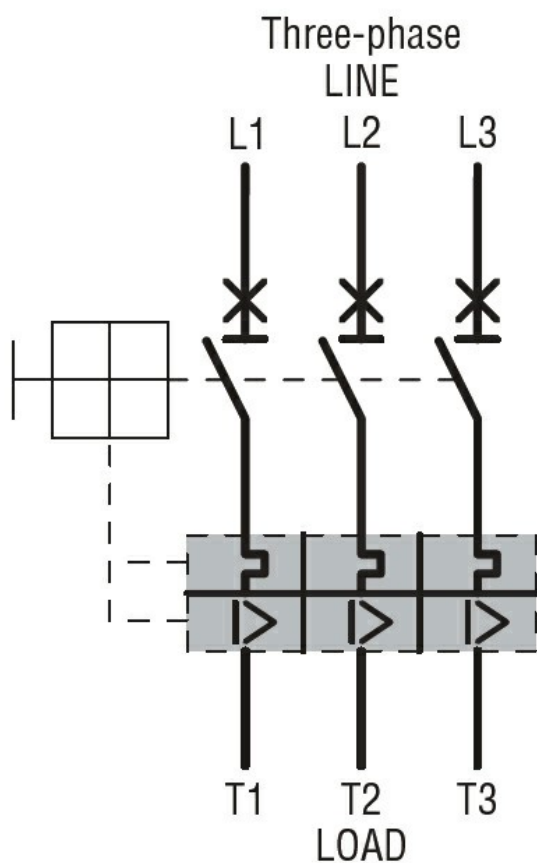

Certifications and compliance

Certifications

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-2

IEC/EN 60947-4-1

UL508

Compliance

cULus

EAC

ETIM 6 classification