



RF38  
Motor protection  
relay

Product designation

Product type designation

### General characteristics

Number of poles	nr.	3
Overvoltage category		III
Pollution degree		3
Frontal IP degree		IP20
Terminals IP degree		-
Type of release		Thermal
Protection fuse		
	gG (IEC)	A 32
	aM (IEC)	A 16
	RK5 (UL)	A 50
Phase failure detection		no
Reset mode		Manual or automatic

### Power circuit characteristics

Rated insulation voltage $U_i$	V	690
Rated impulse withstand voltage $U_{imp}$	kV	6
Rated operational voltage	V	690
Operating frequency		
	Operational frequency min	Hz 0
	Operational frequency max	Hz 400
Operating current		
	Operational current min	A 9
	Operational current max	A 14
Tripping class		10A
Test Button		yes
Trip indicator		yes
Terminals		

type	Screw and washer
screw	M4
width	12.6
tool	Phillips 2

Tightening torque for terminals

min	Nm	2
max	Nm	2.5
min	lbft	1.5
max	lbft	1.8

Conductor section


AWG max	8
---------	---

### Auxiliary circuit characteristics


Auxiliary contacts

	NO	nr.	1
	NC	nr.	1
Rated insulation voltage Ui		V	690
Rated impulse withstand voltage Uimp		kV	6
Rated operational voltage		V	690
Operating current AC15	24V	A	3
	120V	A	3
	240V	A	1.5
	380V	A	0.95
	480V	A	0.75
	500V	A	0.72
	600V	A	0.6
Operating current DC13	125V	A	0.11
	600V	A	0.22
Conventional free air thermal current Ith		A	10
Terminals	type		Screw and washer
	screw		M3,5
	width	mm	8
	tool		Phillips 2
Conductor section	Flexible w/o lug max	mm <sup>2</sup>	2.5
	Flexible c/w lug max	mm <sup>2</sup>	2.5
Tightening torque for terminals	min	Nm	0.8
	max	Nm	1
	min	lbft	0.6
	max	lbft	0.74
UL/CSA and IEC/EN 60947-5-1 designation			B600-R300
Ambient conditions			
Operating temperature	min	°C	-25
	max	°C	60
Storage temperature	min	°C	-50
	max	°C	70
Compensation temperature	min	°C	-20
	max	°C	60
Max altitude		m	3000
Mechanical features			
Operating position	normal		Vertical plan
	allowable		±30°
Weight		g	160
UL technical data			
Full-load current (FLA) for three-phase AC motor	at 480V	A	14
	at 600V	A	14
Dimensions			


**BF00 A... BF09 A... - BF12 A... - BF18 A... - BF25 A...** three poles with **RF...38** thermal overload relay

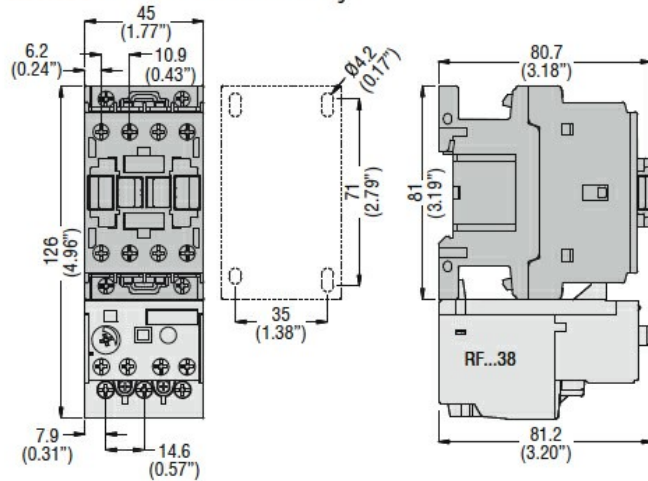

**BF26 00A... - BF32 00A... - BF38 00A...** three poles with **RF...38** thermal overload relay

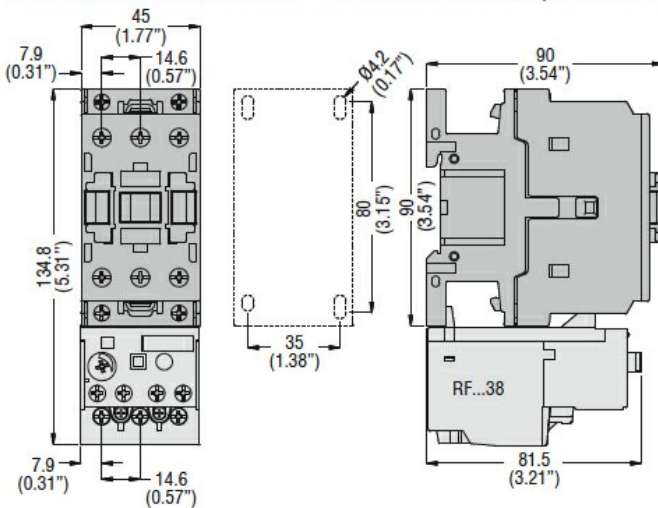

**Wiring diagrams**

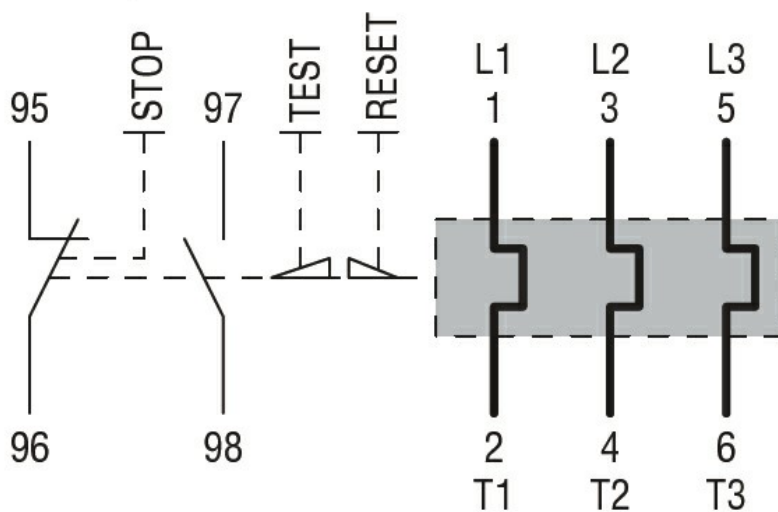

**Certifications and compliance**

**Compliance**

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-4-1

---

UL508

---

Certifications

CCC

---

cULus

---

EAC