BF3200A57560

THREE-POLE CONTACTOR, IEC OPERATING CURRENT IE (AC3) = 32A, AC COIL 60HZ, 575VAC

Product designation			Power contactor
Product type designation			BF32
Contact characteristics			
Number of poles		nr.	3
Rated insulation voltage Ui		V	690
Rated impulse withstand voltage Uimp		kV	6
Operating frequency			
	Operational frequency min	Hz	25
	Operational frequency max	Hz	400
Conventional free air thermal current Ith		A	56
Operating current			
	Operational current AC1 (≤40°C)	A	56
	Operational current AC3 (≤440V ≤55°C)	A	32
	Operational current AC4 (400V)	A	13.5
Rated operational power AC1 (T≤40°C)			
	230V	kW	21
	400V	kW	36
	500V	kW	45
	690V	kW	62
Rated operational power AC3A (T≤55°C)			
	Rated operational power AC3 (T≤55°C) 230V	kW	8.8
	Rated operational power AC3 (T≤55°C) 400V	kW	16
	Rated operational power AC3 (T≤55°C) 415V	kW	17
	Rated operational power AC3 (T≤55°C) 440V	kW	17
	Rated operational power AC3 (T≤55°C) 500V	kW	20
	Rated operational power AC3 (T≤55°C) 690V	kW	22
Short-time allowable current for 10s (IEC/EN60947-1)		A	320
Protection fuse			
	gG (IEC)	A	63
	aM (IEC)	A	32
Making capacity (RMS value)		A	320
Breaking capacity at voltage			
	Breaking capacity 440V	A	256
	Breaking capacity 500V	A	240
	Breaking capacity 690V	A	192
Resistance per pole (average value)		mΩ	2
Power dissipation per pole (average value)			
	Power dissipation pole (average value) Ith	W	6
	AC3	W	2
Tightening torque for terminals			
	min	Nm	2.5
	max	Nm	3
	min	lbft	1.8
	max	lbft	2.2
Tightening torque for coil terminal			

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

		min	Nm	0.8
		max	Nm	1
		min	lbft	0.8
		max	lbft	0.74
max number of wires simultaneously connectable			nr.	2
Conductor section				
	AWG			
		min		14
		max		6
	Flexible w/o lug conductor section			
		min	mm²	2.5
		max	mm²	16
	Flexible c/w lug conductor section			
		min	mm²	1
		max	mm²	10
	Flexible with insulated spade lug conductor section			
		min	mm²	1
		max	mm²	10
Power terminal protection according to IEC/EN 60529				IP20 when wired
Auxiliary contact characteristics				
Operational current AC1 (≤40°C)			A	56
Operating current DC13				
		110V	A	Screw / DIN rail 35mm
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-50
		max	°C	70
	Storage temperature			
		min	°C	-60
		max	°C	80
Max altitude			m	3000
Operating position				
		normal		Vertical plan
		allowable		±30°
Mounting				Screw / DIN rail 35mm
Weight			g	0.414
Operations				
Mechanical life			Cycles	20000000
Electrical life			Cycles	1600000
Safety related data				
Performance level B10d according to EN/ISO 13489-1				
		rated load	Cicli	1600000
		mechanical load	Cicli	20000000
Mirror contats according to IEC/EN 609474-4-1				yes
EMC compatibility				yes
AC coil operating				
AC operating voltage				
	of 50/60Hz coil powered at 50Hz			
		pick-up		
		min	%Us	0.8

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

			max	%Us	1.1
		drop-out			
			min	%Us	0.2
			max	%Us	0.55
	of 50/60Hz coil powered at 60Hz				
		pick-up			
			min	%Us	0.85
			max	%Us	1.1
		drop-out			
			min	%Us	0.2
			max	%Us	0.55
	of 60Hz coil powered at 60Hz				
		pick-up			
			min	%Us	0.8
			max	%Us	1.1
		drop-out			
			min	%Us	0.2
			max	%Us	0.55
AC operating voltage					
	of 50/60Hz coil powered at 50Hz				
			in-rush	VA	75
			holding	VA	9
	of 50/60Hz coil powered at 60Hz				
			in-rush	VA	70
			holding	VA	6.5
	of 60Hz coil powered at 60Hz				
			in-rush	VA	75
			holding	VA	9
Dissipation at holding ≤20°C 50Hz				W	2.5
Max cycles frequency					
Mechanical operations				Cycles/h	3600
Operating times					
Average time for Us control					
	in AC				
		Closing NO			
			min	ms	8
			max	ms	24
		Opening NO			
			min	ms	5
			max	ms	15
UL technical data					
Full-load current (FLA) for three-phase AC motor					
			at 480V	A	27
			at 600V	A	27
Yielded mechanical performance					
	for single-phase AC motor				
			at 110/120V	hp	3
			at 230V	hp	7.5
	for three-phase AC motor				
			at 200/208V	hp	10
			at 220/230V	hp	10
			at 460/480V	hp	20
			at 575/600V	hp	25
General USE					

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

BF3200A57560

THREE-POLE CONTACTOR, IEC OPERATING CURRENT IE (AC3) = 32A, AC COIL 60HZ, 575VAC

Contactor

AC current	A	32

Other features

Pollution degree	3

Dimensions

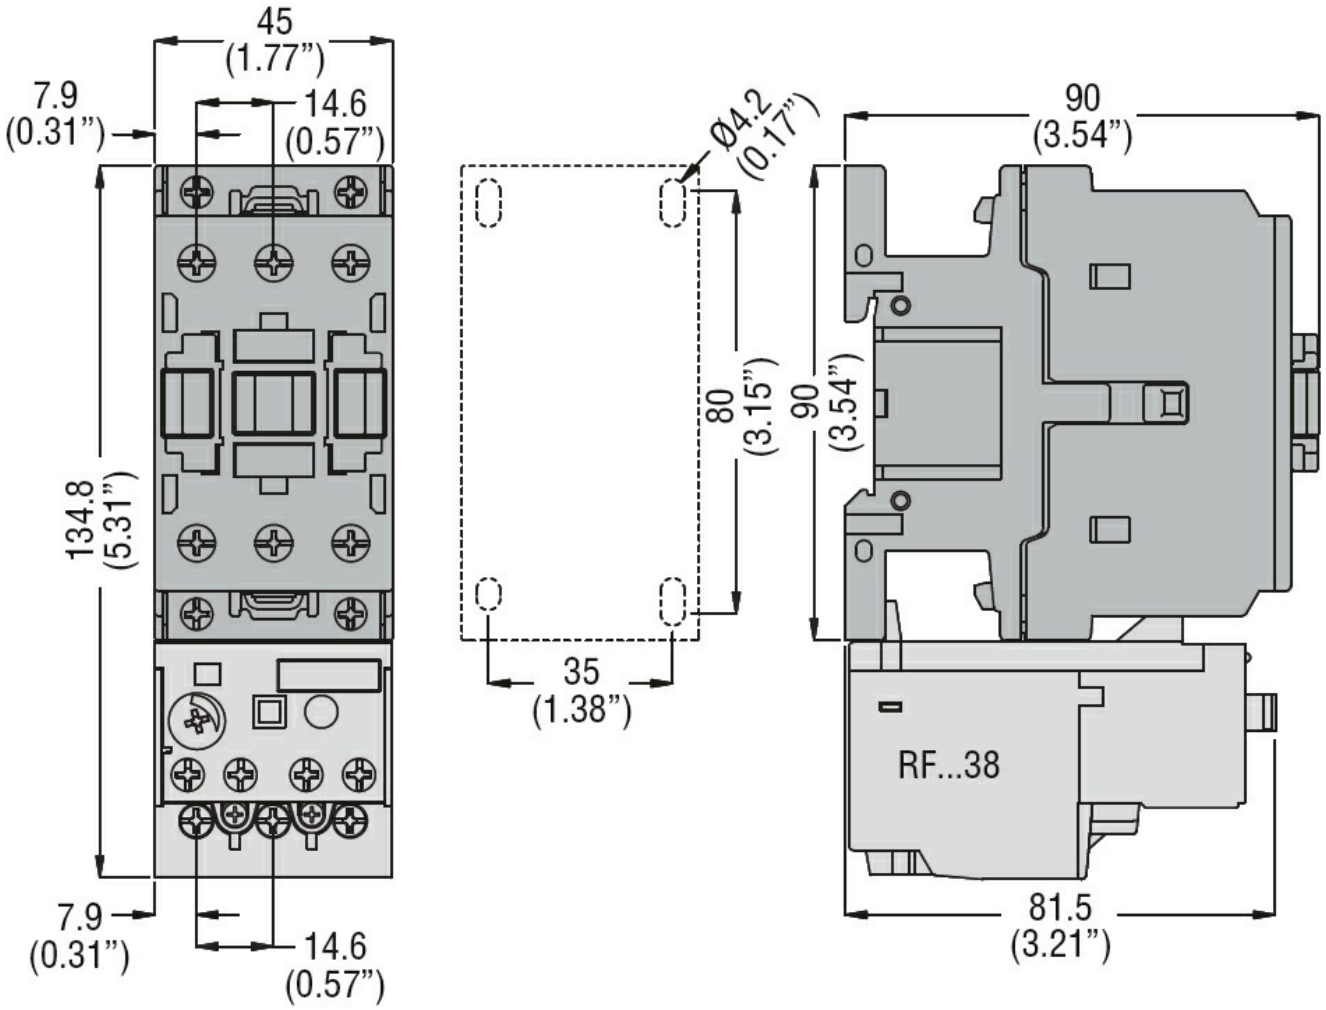

Wiring diagrams

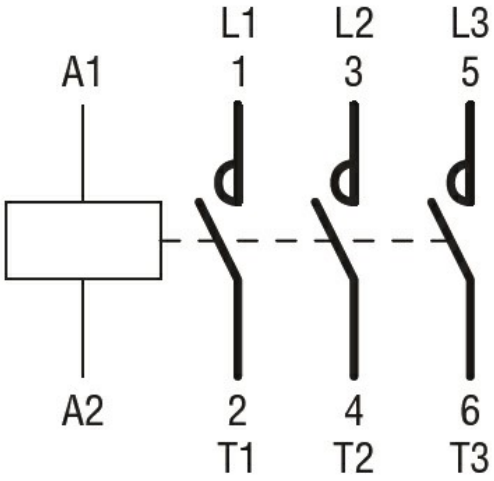

Certifications and compliance

Certifications

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

	CSA C22.2 n° 60947-1
	CSA C22.2 n° 60947-4-1
	IEC/EN 60947-1
	IEC/EN 60947-4-1
	UL 60947-1
	UL 60947-4-1
Compliance	
	CCC
	cULus
	EAC

ETIM 6 classification

EC000066 - Power contactor, AC switching

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding