BF5000A400

THREE-POLE CONTACTOR, IEC OPERATING CURRENT IE (AC3) = 50A, AC COIL 50/60HZ, 400VAC

Product designation			Power contactor
Product type designation			BF50
Contact characteristics			
Number of poles		nr.	3
Rated insulation voltage Ui		V	1000
Rated impulse withstand voltage Uimp		kV	8
Operating frequency			
	Operational frequency min	Hz	25
	Operational frequency max	Hz	400
Conventional free air thermal current Ith		A	90
Operating current			
	Operational current AC1 (≤40°C)	A	90
	Operational current AC3 (≤440V ≤55°C)	A	50
	Operational current AC4 (400V)	A	28
Rated operational power AC1 (T≤40°C)			
	230V	kW	34
	400V	kW	59
	500V	kW	74
	690V	kW	102
Rated operational power AC3A (T≤55°C)			
	Rated operational power AC3 (T≤55°C) 230V	kW	15
	Rated operational power AC3 (T≤55°C) 400V	kW	22
	Rated operational power AC3 (T≤55°C) 415V	kW	30
	Rated operational power AC3 (T≤55°C) 440V	kW	30
	Rated operational power AC3 (T≤55°C) 500V	kW	30
	Rated operational power AC3 (T≤55°C) 690V	kW	37
	Rated operational power AC3 (T≤55°C) 1000V	kW	22
Short-time allowable current for 10s (IEC/EN60947-1)		A	400
Protection fuse			
	gG (IEC)	A	100
	aM (IEC)	A	50
Making capacity (RMS value)		A	500
Breaking capacity at voltage			
	Breaking capacity 440V	A	400
	Breaking capacity 500V	A	352
	Breaking capacity 690V	A	312
Resistance per pole (average value)		mΩ	0.8
Power dissipation per pole (average value)			
	Power dissipation pole (average value) Ith	W	6.5
	AC3	W	2
Tightening torque for terminals			
	min	Nm	4
	max	Nm	5
	min	lbft	2.95
	max	lbft	3.69

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

Tightening torque for coil terminal				
		min	Nm	0.8
		max	Nm	1
		min	lbft	0.8
		max	lbft	0.74
max number of wires simultaneously connectable			nr.	2
Conductor section				
	AWG			
		min		14
		max		2
	Flexible w/o lug conductor section			
		min	mm²	1.5
		max	mm²	35
	Flexible c/w lug conductor section			
		min	mm²	1.5
		max	mm²	35
Power terminal protection according to IEC/EN 60529				IP20 front
Auxiliary contact characteristics				
Operational current AC1 (≤40°C)			A	90
Operating current DC13				
		110V	A	Screw / DIN rail 35mm
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-50
		max	°C	70
	Storage temperature			
		min	°C	-60
		max	°C	80
Max altitude			m	3000
Operating position				
		normal		Vertical plan
		allowable		±30°
Mounting				Screw / DIN rail 35mm
Weight			g	1.02
Operations				
Mechanical life			Cycles	15000000
Electrical life			Cycles	1400000
Safety related data				
Performance level B10d according to EN/ISO 13489-1				
		rated load	Cicli	1400000
		mechanical load	Cicli	15000000
Mirror contats according to IEC/EN 609474-4-1				yes
EMC compatibility				yes
AC coil operating				
AC operating voltage				
	of 50/60Hz coil powered at 50Hz			
		pick-up		
			min	%Us 0.8
			max	%Us 1.1
		drop-out		

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

		min	%Us	0.2
		max	%Us	0.55
	of 50/60Hz coil powered at 60Hz			
	pick-up			
		min	%Us	0.85
		max	%Us	1.1
	drop-out			
		min	%Us	0.4
		max	%Us	0.55
	of 60Hz coil powered at 60Hz			
	pick-up			
		min	%Us	0.8
		max	%Us	1.1
	drop-out			
		min	%Us	0.2
		max	%Us	0.55
AC operating voltage				
	of 50/60Hz coil powered at 50Hz			
		in-rush	VA	210
		holding	VA	15
	of 50/60Hz coil powered at 60Hz			
		in-rush	VA	195
		holding	VA	13
	of 60Hz coil powered at 60Hz			
		in-rush	VA	210
		holding	VA	15
Dissipation at holding ≤20°C 50Hz			W	5.0
Max cycles frequency				
Mechanical operations			Cycles/h	3600
Operating times				
Average time for Us control				
	in AC			
	Closing NO			
		min	ms	12
		max	ms	28
	Opening NO			
		min	ms	8
		max	ms	22
UL technical data				
Full-load current (FLA) for three-phase AC motor				
		at 480V	A	52
		at 600V	A	41
Yielded mechanical performance				
	for single-phase AC motor			
		at 110/120V	hp	5
		at 230V	hp	10
	for three-phase AC motor			
		at 200/208V	hp	15
		at 220/230V	hp	20
		at 460/480V	hp	40
		at 575/600V	hp	40
General USE				
	Contactor			
		AC current	A	32

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

BF5000A400

THREE-POLE CONTACTOR, IEC OPERATING CURRENT IE (AC3) = 50A, AC COIL 50/60HZ, 400VAC

Other features

Pollution degree	3

Dimensions

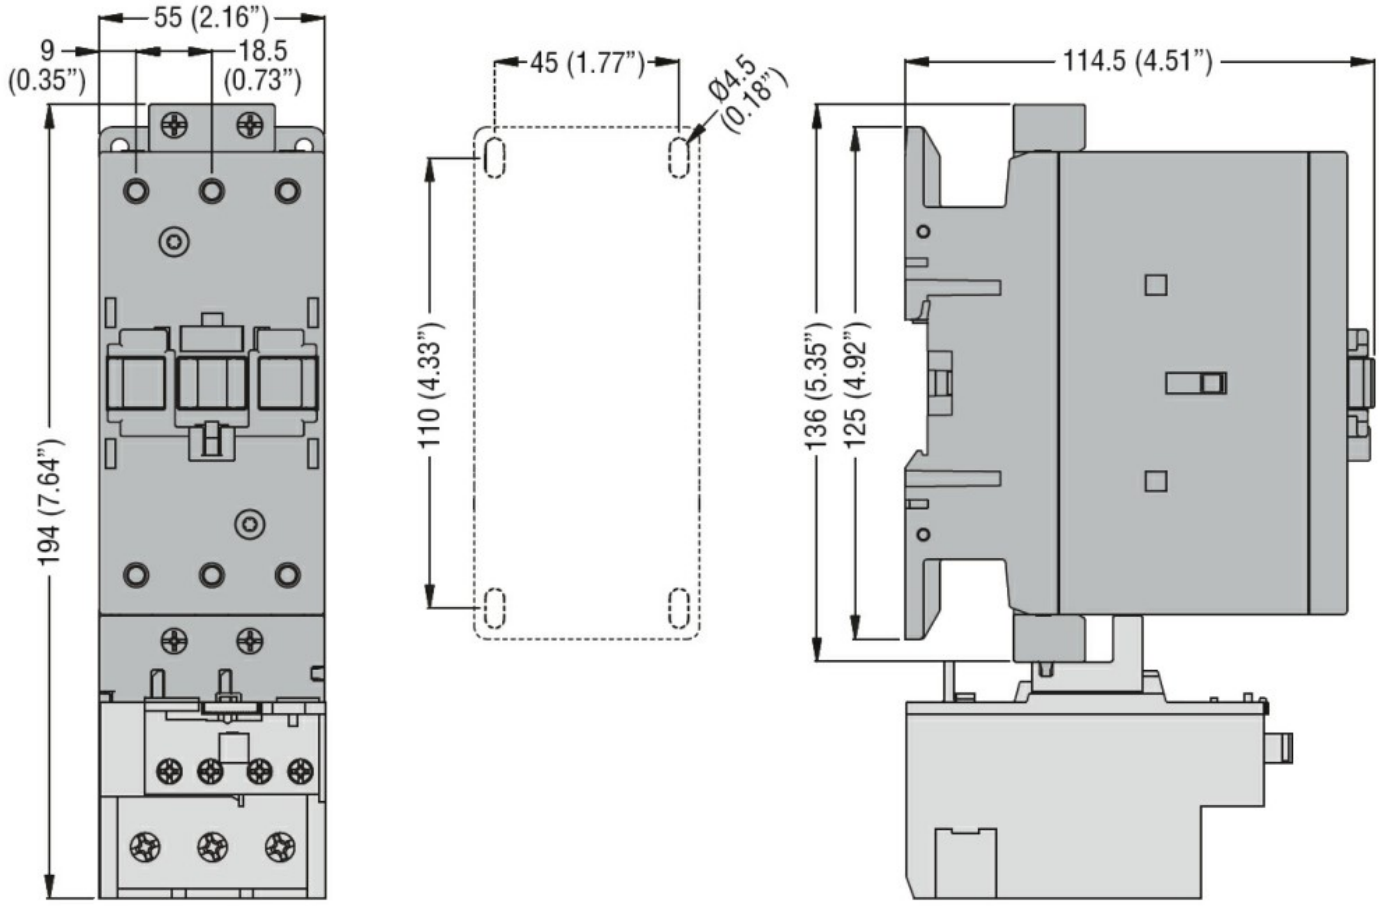

Wiring diagrams

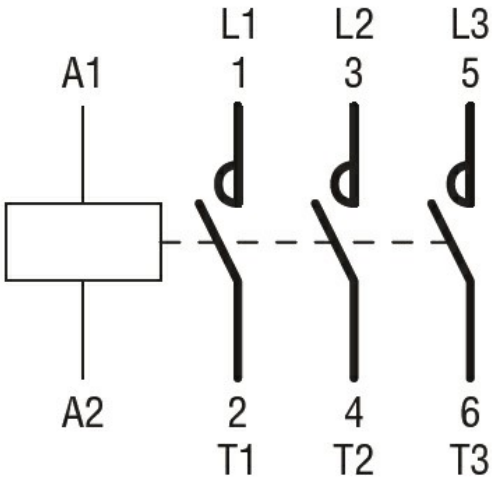

Certifications and compliance

Certifications

CSA C22.2 n° 60947-1
CSA C22.2 n° 60947-4-1
IEC/EN 60947-1
IEC/EN 60947-4-1
UL 60947-1

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

	UL 60947-4-1
Compliance	
	CCC
	cULus

ETIM 6 classification

EC000066 - Power contactor, AC switching

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding