



| | | | | |
|--|--|-----------------|------|-----------------|
| Product designation | | | | Power contactor |
| Product type designation | | | | BFK26 |
| Contact characteristics | | | | |
| Number of poles | nr. | 3 | | |
| Rated insulation voltage U_i | V | 690 | | |
| Rated impulse withstand voltage U_{imp} | kV | 6 | | |
| Operating frequency | Operational frequency min | Hz | 25 | |
| | Operational frequency max | Hz | 400 | |
| | Conventional free air thermal current I_{th} | A | 45 | |
| Rated operational power AC6b ($T \leq 40^\circ C$) | 230V | kvar | 11 | |
| | 400V | kvar | 20 | |
| | 500V | kvar | 22 | |
| | 690V | kvar | 25 | |
| | Short-time allowable current for 10s (IEC/EN60947-1) | A | 210 | |
| Protection fuse | gG (IEC) | A | 40 | |
| | Resistance per pole (average value) | m Ω | 2 | |
| Tightening torque for terminals | min | Nm | 2.5 | |
| | max | Nm | 3 | |
| | min | lbft | 1.8 | |
| | max | lbft | 2.2 | |
| Tightening torque for coil terminal | min | Nm | 0.8 | |
| | max | Nm | 1 | |
| | min | lbft | 0.8 | |
| | max | lbft | 0.74 | |
| max number of wires simultaneously connectable | nr. | 2 | | |
| Conductor section | AWG | min | 14 | |
| | | max | 6 | |
| Flexible w/o lug conductor section | min | mm ² | 2.5 | |
| | max | mm ² | 16 | |
| Flexible c/w lug conductor section | min | mm ² | 1 | |
| | max | mm ² | 10 | |
| Flexible with insulated spade lug conductor section | min | mm ² | 1 | |
| | max | mm ² | 10 | |
| Power terminal protection according to IEC/EN 60529 | | | | IP20 when wired |
| Auxiliary contact characteristics | | | | |

Operating current DC13

110V A Screw / DIN rail
35mm

Ambient conditions

Temperature

Operating temperature

min °C -50
max °C 70

Storage temperature

min °C -60
max °C 80

Max altitude

m 3000

Operating position

normal allowable Vertical plan
±30°

Mounting

Screw / DIN rail
35mm

Weight

g 0.46

Operations

Mechanical life

Cycles 2000000

Electrical life

Cycles 400000

Safety related data

Performance level B10d according to EN/ISO 13489-1

rated load Cicli 400000
mechanical load Cicli 2000000

EMC compatibility

yes

AC coil operating

AC operating voltage

of 50/60Hz coil powered at 50Hz
pick-up

min %Us 0.8
max %Us 1.1

drop-out

min %Us 0.2
max %Us 0.55

of 50/60Hz coil powered at 60Hz
pick-up

min %Us 0.85
max %Us 1.1

drop-out

min %Us 0.2
max %Us 0.55

of 60Hz coil powered at 60Hz
pick-up

min %Us 0.8
max %Us 1.1

drop-out

min %Us 0.2
max %Us 0.55

AC operating voltage

of 50/60Hz coil powered at 50Hz

in-rush VA 75
holding VA 9

of 50/60Hz coil powered at 60Hz

| | | |
|---------|----|-----|
| in-rush | VA | 70 |
| holding | VA | 6.5 |

of 60Hz coil powered at 60Hz

| | | |
|---------|----|----|
| in-rush | VA | 75 |
| holding | VA | 9 |

| | | |
|---|---|-----|
| Dissipation at holding $\leq 20^{\circ}\text{C}$ 50Hz | W | 2.5 |
|---|---|-----|

Max cycles frequency

| | | |
|-----------------------|----------|------|
| Mechanical operations | Cycles/h | 3600 |
|-----------------------|----------|------|

Operating times

Average time for Us control
in AC

| | | | |
|------------|-----|----|----|
| Closing NO | min | ms | 8 |
| | max | ms | 24 |
| Opening NO | min | ms | 5 |
| | max | ms | 15 |
| Closing NC | min | ms | 9 |
| | max | ms | 20 |
| Opening NC | min | ms | 9 |
| | max | ms | 17 |

UL technical data

Yielded mechanical performance


for single-phase AC motor

| | | |
|-------------|----|---|
| at 110/120V | hp | 2 |
|-------------|----|---|


Other features

| | |
|------------------|---|
| Pollution degree | 3 |
|------------------|---|

Dimensions

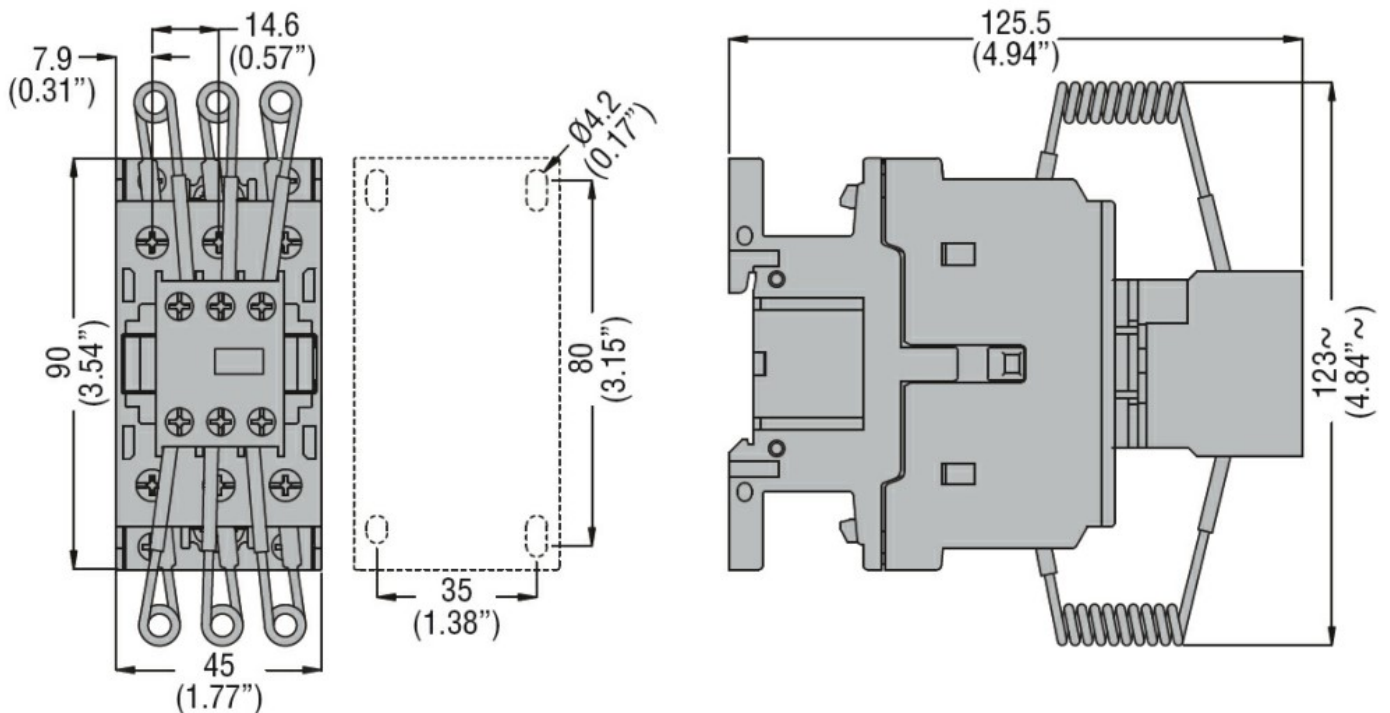

Wiring diagrams

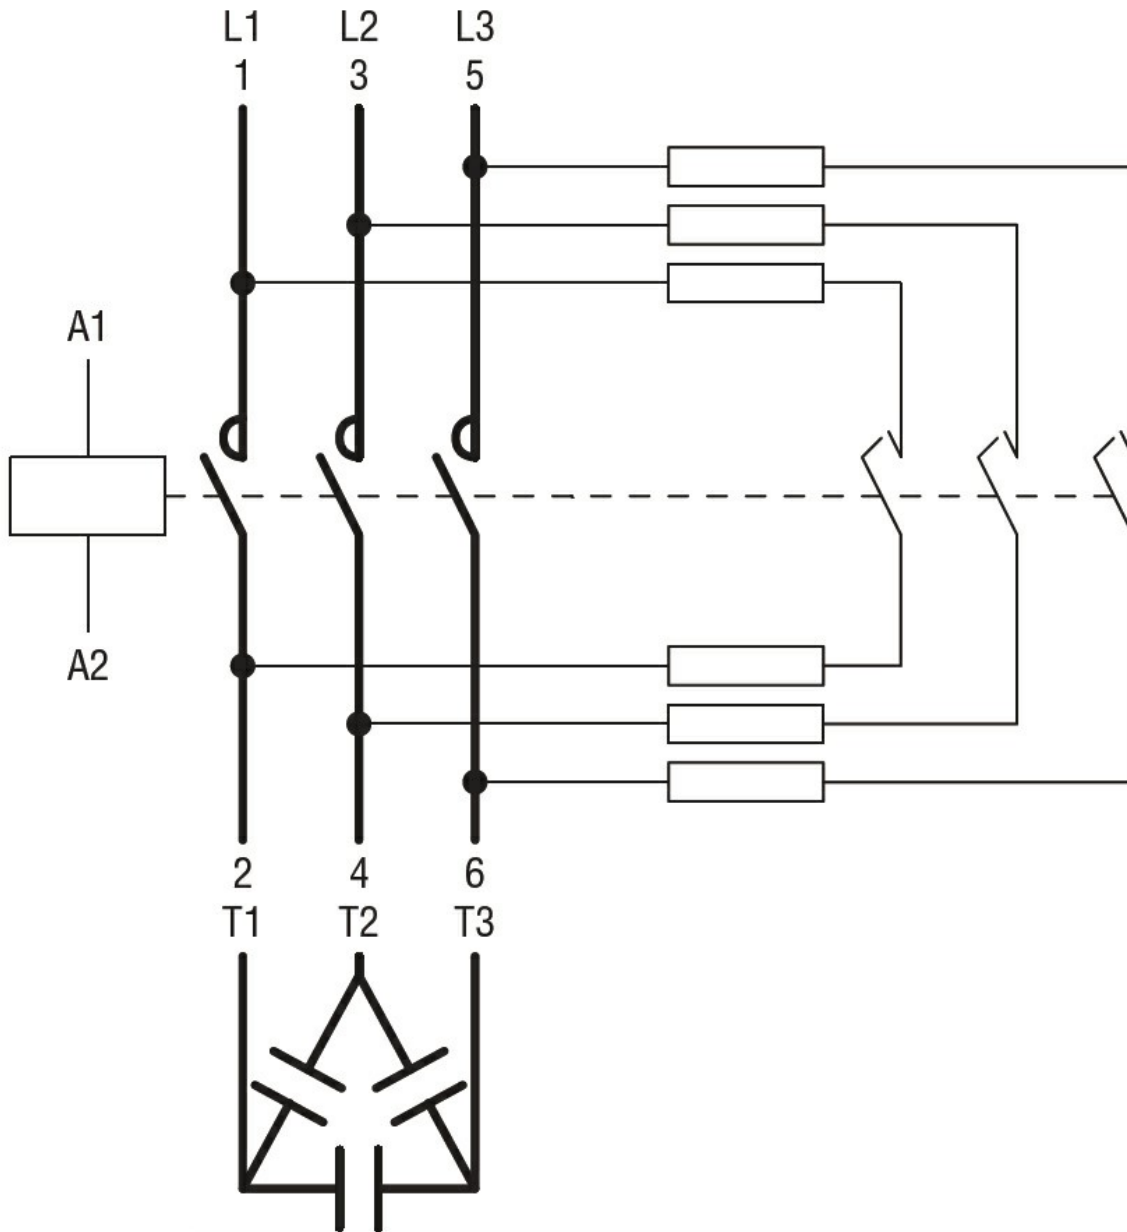

Certifications and compliance

Certifications

CSA C22.2 n° 60947-1
CSA C22.2 n° 60947-4-1
IEC/EN 60947-1
IEC/EN 60947-4-1
UL 60947-1
UL 60947-4-1

Compliance

CCC
cULus
EAC

ETIM 6 classification

EC000066 - Power contactor, AC switching