# BF3200D012

THREE-POLE CONTACTOR, IEC OPERATING CURRENT IE (AC3) = 32A, DC COIL, 12VDC

| | | | |
|---|---|---|---|
| Product designation | | | Power contactor |
| Product type designation | | | BF32 |
| **Contact characteristics** | | | |
| Number of poles | | nr. | 3 |
| Rated insulation voltage Ui | | V | 690 |
| Rated impulse withstand voltage Uimp | | kV | 6 |
| Operating frequency | | | |
| | Operational frequency min | Hz | 25 |
| | Operational frequency max | Hz | 400 |
| Conventional free air thermal current Ith | | A | 56 |
| Operating current | | | |
| | Operational current AC1 (≤40°C) | A | 56 |
| | Operational current AC3 (≤440V ≤55°C) | A | 32 |
| | Operational current AC4 (400V) | A | 13.5 |
| Rated operational power AC1 (T≤40°C) | | | |
| | 230V | kW | 21 |
| | 400V | kW | 36 |
| | 500V | kW | 45 |
| | 690V | kW | 62 |
| Rated operational power AC3A (T≤55°C) | | | |
| | Rated operational power AC3 (T≤55°C) 230V | kW | 8.8 |
| | Rated operational power AC3 (T≤55°C) 400V | kW | 16 |
| | Rated operational power AC3 (T≤55°C) 415V | kW | 17 |
| | Rated operational power AC3 (T≤55°C) 440V | kW | 17 |
| | Rated operational power AC3 (T≤55°C) 500V | kW | 20 |
| | Rated operational power AC3 (T≤55°C) 690V | kW | 22 |
| Short-time allowable current for 10s (IEC/EN60947-1) | | A | 320 |
| Protection fuse | | | |
| | gG (IEC) | A | 63 |
| | aM (IEC) | A | 32 |
| Making capacity (RMS value) | | A | 320 |
| Breaking capacity at voltage | | | |
| | Breaking capacity 440V | A | 256 |
| | Breaking capacity 500V | A | 240 |
| | Breaking capacity 690V | A | 192 |
| Resistance per pole (average value) | | mΩ | 2 |
| Power dissipation per pole (average value) | | | |
| | Power dissipation pole (average value) Ith | W | 6 |
| | AC3 | W | 2 |
| Tightening torque for terminals | | | |
| | min | Nm | 2.5 |
| | max | Nm | 3 |
| | min | lbft | 1.8 |
| | max | lbft | 2.2 |
| Tightening torque for coil terminal | | | |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

| | | | | |
|---|---|---|---|---|
| | | min | Nm | 0.8 |
| | | max | Nm | 1 |
| | | min | lbft | 0.8 |
| | | max | lbft | 0.74 |
| max number of wires simultaneously connectable | | | nr. | 2 |
| Conductor section | | | | |
| | AWG | | | |
| | | min | | 14 |
| | | max | | 6 |
| | Flexible w/o lug conductor section | | | |
| | | min | mm² | 2.5 |
| | | max | mm² | 16 |
| | Flexible c/w lug conductor section | | | |
| | | min | mm² | 1 |
| | | max | mm² | 10 |
| | Flexible with insulated spade lug conductor section | | | |
| | | min | mm² | 1 |
| | | max | mm² | 10 |
| Power terminal protection according to IEC/EN 60529 | | | | IP20 when wired |
| **Auxiliary contact characteristics** | | | | |
| Operational current AC1 (≤40°C) | | | A | 56 |
| Operating current DC13 | | | | |
| | | 110V | A | Screw / DIN rail 35mm |
| **Ambient conditions** | | | | |
| Temperature | | | | |
| | Operating temperature | | | |
| | | min | °C | -50 |
| | | max | °C | 70 |
| | Storage temperature | | | |
| | | min | °C | -60 |
| | | max | °C | 80 |
| Max altitude | | | m | 3000 |
| Operating position | | | | |
| | | normal | | Vertical plan |
| | | allowable | | ±30° |
| Mounting | | | | Screw / DIN rail 35mm |
| Weight | | | g | 0.562 |
| **Operations** | | | | |
| Mechanical life | | | Cycles | 20000000 |
| Electrical life | | | Cycles | 1600000 |
| **Safety related data** | | | | |
| Performance level B10d according to EN/ISO 13489-1 | | | | |
| | | rated load | Cicli | 1600000 |
| | | mechanical load | Cicli | 20000000 |
| Mirror contats according to IEC/EN 609474-4-1 | | | | yes |
| EMC compatibility | | | | yes |
| **DC coil operating** | | | | |
| DC rated control voltage | | | | |
| | | min | V | 6 |
| DC operating voltage | | | | |
| | pick-up | | | |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

| | | | | |
|---|---|---|---|---|
| | | min | %Us | 0.7 |
| | | max | %Us | 1.25 |
| | drop-out | | | |
| | | min | %Us | 0.1 |
| | | max | %Us | 0.40 |
| Average coil consuption ≤20°C | | | | |
| | | in-rush | W | 5.4 |
| | | holding | W | 5.4 |
| **Max cycles frequency** | | | | |
| Mechanical operations | | | Cycles/h | 3600 |
| **Operating times** | | | | |
| Average time for Us control | | | | |
| | in AC | | | |
| | Closing NO | | | |
| | | min | ms | 8 |
| | | max | ms | 24 |
| | Opening NO | | | |
| | | min | ms | 5 |
| | | max | ms | 15 |
| | in DC | | | |
| | Closing NO | | | |
| | | min | ms | 54 |
| | | max | ms | 66 |
| | Opening NO | | | |
| | | min | ms | 14 |
| | | max | ms | 17 |
| **UL technical data** | | | | |
| Full-load current (FLA) for three-phase AC motor | | | | |
| | | at 480V | A | 27 |
| | | at 600V | A | 27 |
| Yielded mechanical performance | | | | |
| | for single-phase AC motor | | | |
| | | at 110/120V | hp | 3 |
| | | at 230V | hp | 7.5 |
| | for three-phase AC motor | | | |
| | | at 200/208V | hp | 10 |
| | | at 220/230V | hp | 10 |
| | | at 460/480V | hp | 20 |
| | | at 575/600V | hp | 25 |
| General USE | | | | |
| | Contactor | | | |
| | | AC current | A | 32 |
| **Other features** | | | | |
| Pollution degree | | | | 3 |
| **Dimensions** | | | | |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

# BF3200D012

THREE-POLE CONTACTOR, IEC OPERATING CURRENT IE (AC3) = 32A, DC COIL, 12VDC

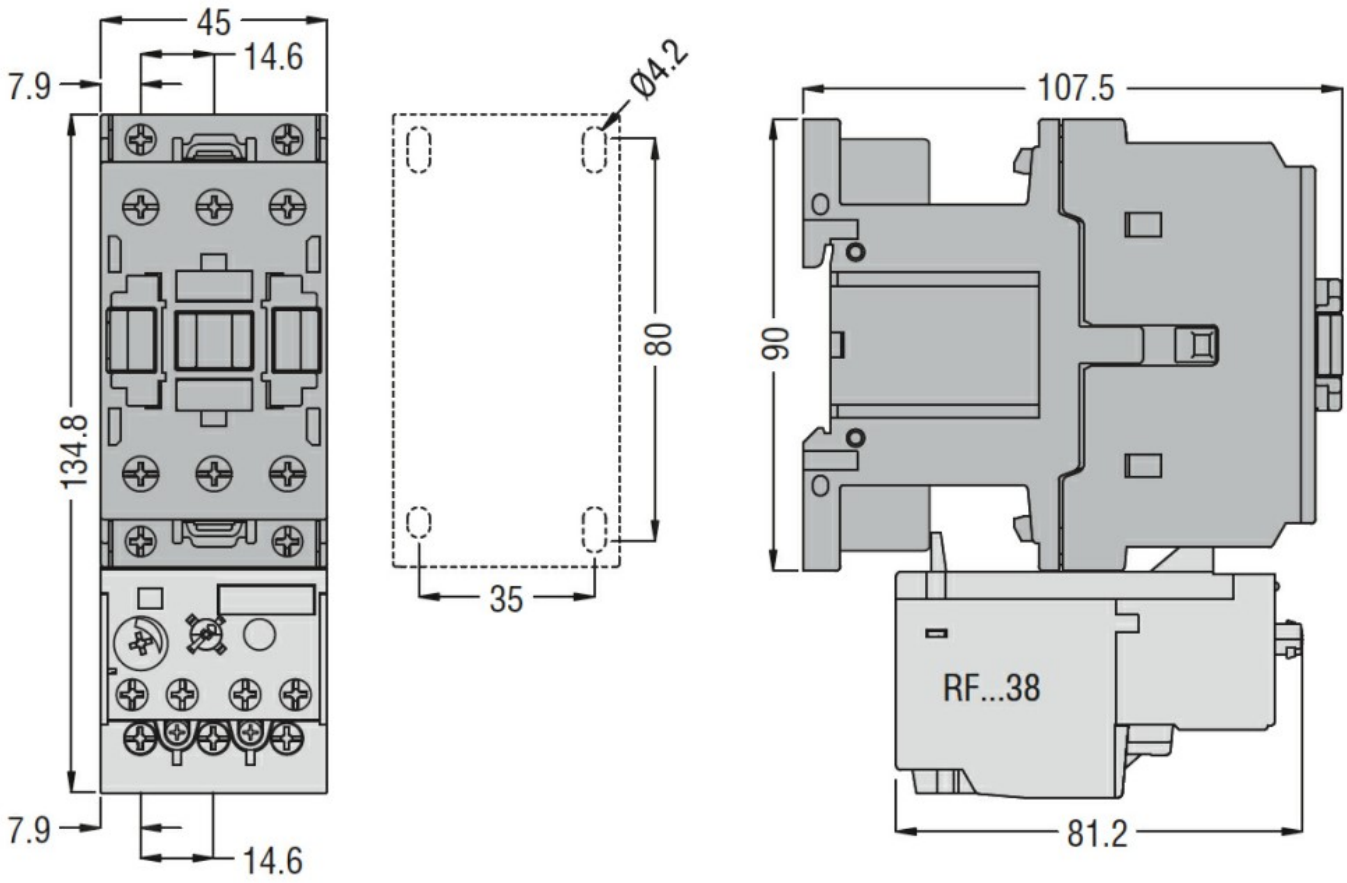


## Wiring diagrams

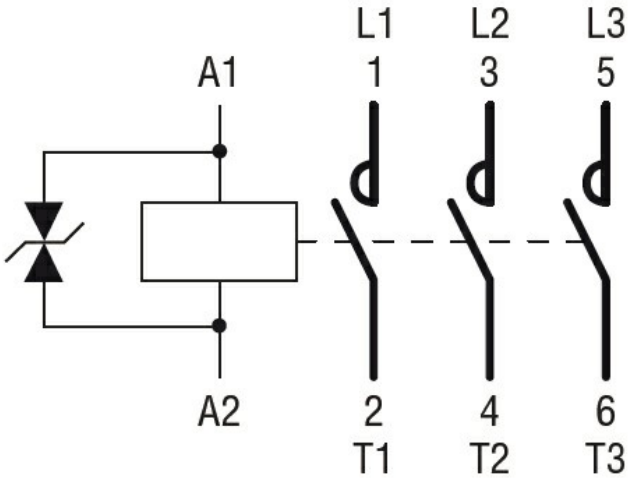


## Certifications and compliance

Certifications

| |
|---|
| CSA C22.2 n° 60947-1 |
| CSA C22.2 n° 60947-4-1 |
| IEC/EN 60947-1 |
| IEC/EN 60947-4-1 |
| UL 60947-1 |
| UL 60947-4-1 |

Compliance

CCC


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

| |
|---|
| cULus |
| EAC |

## ETIM 6 classification

EC000066 - Power contactor, AC switching


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding