

## Liquid Level Controller



### Description

Level control unit of conductive liquids which can be configured for FILLING or EMPTYING. The unit can be used as a two probe system for alarm purposes or a three probe system to control HIGH and LOW levels of a reservoir. Up to four LV1 can be utilized in the same reservoir by connecting all commons (pin 7). The sensitivity of the unit can also be adjusted.

### FEATURES

- Fail-safe control feature
- Rear DIP switch selectable FILLING / EMPTYING
- Adjustable sensitivity
- Modulated AC probe signal to prevent electrolytic corrosion
- Low voltage probe signal
- Power supply ON and Relay ON LEDs
- Output 10A SPDT

### Level Sensing Input Specifications

|                             |         |
|-----------------------------|---------|
| Probe Voltage               | 4 VAC   |
| Probe Current               | 2.5mA   |
| Probe Frequency             | 100Hz   |
| Sensitivity                 | 4 - 50k |
| Response Time               | 1 sec   |
| Max. Probe Cable Length     | 400 m   |
| 2.5 twin and earth screened |         |

### Output Specifications

|                       |   |
|-----------------------|---|
| Output Specifications | SPDT  |
| Rated Isolation       | 6000 VAC  |
| Voltage               | (contact / electric)<br>1000 VAC<br>(contact / contact) |
| Nominal Rate in AC1   | 1500 VA   |
|                       | ( Ag-Ni )   |
| Rated Current         | 10A   |
| Rated Voltage         | 250V  |
| Mechanical Life       | 10x10 <sup>6</sup> cycles                               |
| Electrical Life       | 110x10 <sup>3</sup> cycles (at max load)                |
| Operation Frequency   | ≤ 1800 cycles/h   |

### Supply Specifications

|                       |                  |
|-----------------------|------------------|
| Power Supply AC Type  | 110, 230, 400V   |
| (Galvanic)            | 525V ± 10%       |
|                       | 50 / 60 Hz ± 5Hz |
| Isolation             | 4kV              |
| Consumption           | ± 3VA            |
|                       | ± 6VA 525 V      |
| Power Supply DC Types | 12,24,48 V ± 10% |
| (Non-galvanic)        |                  |
| Isolation             | None             |
| Consumption           | ± 100 mA         |

### General Specifications

|                       |               |
|-----------------------|---------------|
| Power ON Delay        | ≤ 300 ms      |
| Power OFF Delay       | ≤ 200 ms      |
| Indication for        |               |
| Power Supply ON       | LED red       |
| Output ON             | LED green     |
| Environment           |               |
| Degree Of Protection  | IP 20         |
| Operating Temperature | -10 to + 50°C |
| Storage Temperature   | -50 to + 85°C |
| Weight                | 200g          |

## Liquid Level Controller

### Mode of Operations

#### Filling



When the level of the reservoir drops below the low level probe the relay will energize. The relay remain energized until the level of the reservoir rises to the high level probe. The relay de-energizes when the high level probe is submerged and will remain off until the level drops below the low level probe.

#### Example

Level control for conductive liquids Filling a reservoir.

#### Emptying




When the level of the reservoir rises to the high level probe the relay energizes. The relay remains energized until the low level probe is no longer submerged. When the level passes below the low level probe the relay de-energizes and remains off until the level reaches the high level probe again.

#### Example


Emptying a reservoir 2 wire control over long distance.

### Wiring Diagram

Three Probe System

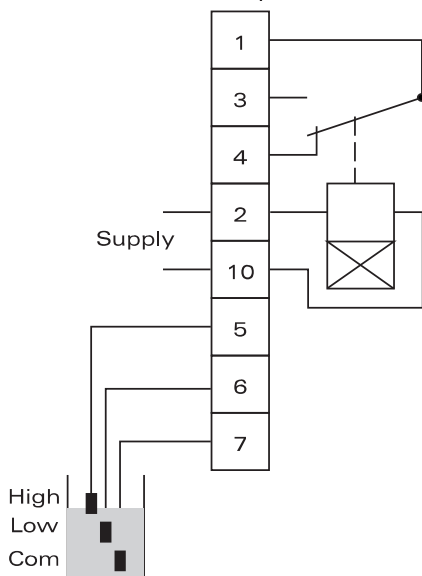

Two Probe System

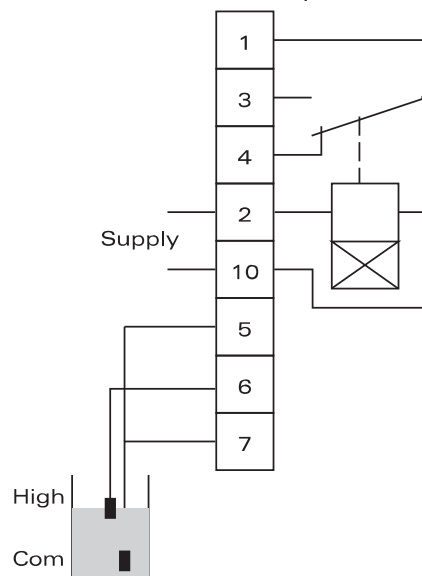

### Operations Diagram

Filling Mode

| Power supply         | Relay On | Relay Off |
|----------------------|----------|-----------|
| Low Level Submerged  | On       | Off       |
| High Level Submerged | Off      | On        |
| Relay On             | On       | Off       |

Emptying Mode

| Power supply         | Relay On | Relay Off |
|----------------------|----------|-----------|
| Low Level Submerged  | On       | Off       |
| High Level Submerged | Off      | On        |
| Relay On             | On       | Off       |