



file n° E300607

SUPPORT RAIL

Code	Reference		Weight (Kg)
TOP1000	TOP PR2000	2	1,2

- One code for all configurations
- Made in aluminium, prepunched with 12.5 mm pitch.
- Length 2 meters
- Used in pairs, thanks to the asymmetric shape, it forms a high mechanical resistance structure (for high horizontal loads)

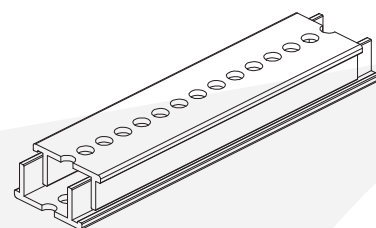

file n° E300607


BLOCKS AND SCREW SET

Code	Reference		Type	Total No. blocks	No. tie-rods	No. bars	S (mm)	bar min-max H (mm)	L (mm)
TOP1005	TOP 2/5T	1	T	6	4	1÷2	5	30-125	50
TOP1010	TOP 2/5TN	1	T+N	8	5	1÷2	5	30-125	50
TOP1015	TOP 4/5T	1	T	6	4	1÷4	5	30-125	75
TOP1020	TOP 4/5TN	1	T+N	8	5	1÷4	5	30-125	75
TOP1025	TOP 1/10T	1	T	6	4	1	10	30-120	50
TOP1030	TOP 1/10TN	1	T+N	8	5	1	10	30-120	50
TOP1035	TOP 2/10T	1	T	6	4	1÷2	10	30-120	75
TOP1040	TOP 2/10TN	1	T+N	8	5	1÷2	10	30-120	75
TOP1045	TOP 3/10T	1	T	6	4	1÷3	10	30-120	100
TOP1050	TOP 3/10TN	1	T+N	8	5	1÷3	10	30-120	100

The set is made of insulating blocks for 5 to 10 mm thick bars and of all the screws and tie-rods needed to make T (3-pole) or T+N (3-pole+neutral) configured bar support

Example: to make a bar support in 3-pole+Neutral(TN), with 2 bars per phase, 10 mm thick = 2/10 TN

Select: Aluminium rail TOP1000
Set of blocks and screws TOP1040

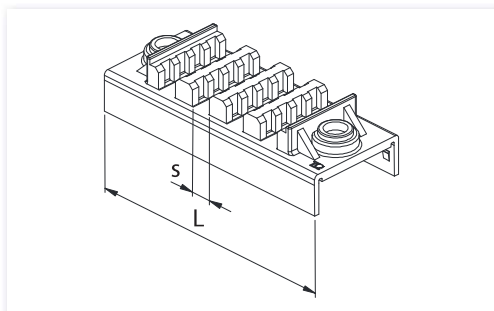

BLOCKS AND SCREW SET Ω TOP 4/10


Code	Reference		Type	n° blocks	n° Tie-rods	n° bars	s (mm)	H min-max bar (mm)	L (mm)
TOP1052	TOP 4/10T	1	T	6	6	1÷4	10	30-120	125
TOP1053	TOP 4/10TN	1	T+N	8	8	1÷4	10	30-120	125



file n° E300607

PRE-ASSEMBLED BAR SUPPORTS

Code	Reference		Type
TOP1060	TOP 2/5TN-400	1	T+N
TOP1065	TOP 1/10TN-400	1	T+N
TOP1070	TOP 2/5TN-600	1	T+N
TOP1075	TOP 2/10TN-600	1	T+N

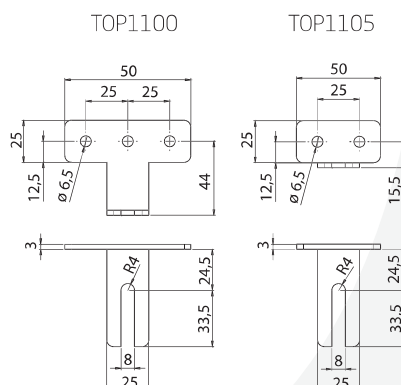

file n° E300607

ACCESSORIES

Code	Reference	Description	
TOP1055	TOP TI	Rilsan tube for tie-rod insulation	100
TOP1100	TOP SQ-O	Bracket for horizontal busbar	10
TOP1105	TOP SQ-V	Bracket for vertical busbar	10