

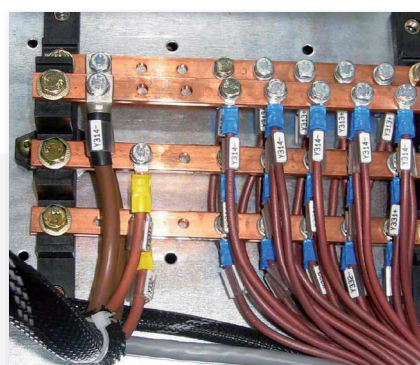
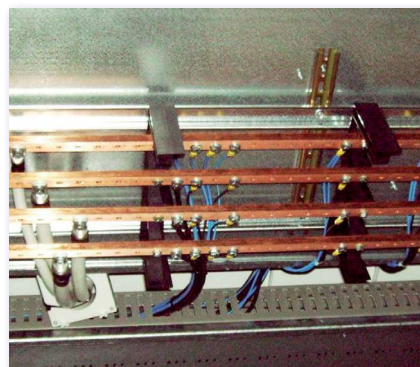


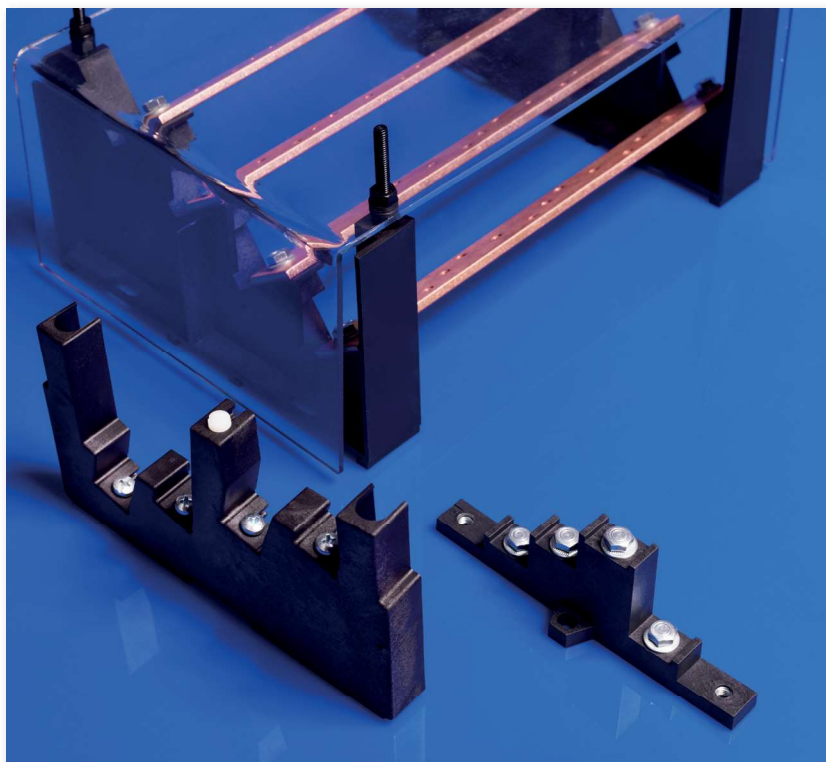


TECHNICAL FEATURES

Polyamide 66 reinforced with 30% fiberglass
Self-extinguishing UL 94-V0
Working temperature: -40°C to +130°C
Continuous working temperature: +125°C
Softening temperature: +250°C
Glow wire test: 960°C
Black colour


M6 screws for bar fastening included for PSP1000 and PSP1005
Protection screen fastening kit included for PSP1000 (cf. code DZP2000) and PSP1005
Direct fastening kit on DIN rail included for PSP1005




PSP 250




PSP 250 HP



PSP 400



PSP 630T



PSP 630TN

REPARTITION SUPPORTS

Code	Reference		Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
PSP1000	PSP 250	8	T+N	150	54	15	130	-
PSP1002	PSP 250 HP	1	T+N	190	104,5	20	162,5	-
PSP1005	PSP 400	2	T+N	216	117	34	200	-
PSP1010	PSP 630T	1	T	180	55	18	-	60
PSP1020	PSP 630TN	1	T+N	240	55	18	-	60