



Clamping Yokes and Accessories

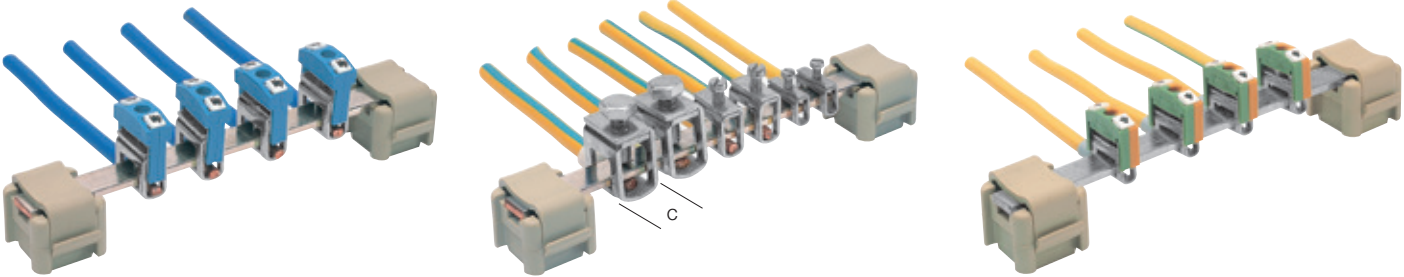

The clamping yokes can be slid onto the 10 x 3 busbar up to 50 mm² and the entire wiring matched to the installation.

BK 4
525 361



BK 10
525 362




BK 35
525 363



Electrical Ratings				
Cross-Section		4 mm ²	10 mm ²	35 mm ²
Insulation Stripping Length (min.-max.)		16 mm	19 mm	19 mm
Fixing Screw		M 3	M 4	M 6
Busbar Dimensions		10 x 3	10 x 3	10 x 3
Torque		0,5 Nm	1,2 Nm	2,8 Nm
Qty.				
		200	100	50
Connection Data				
Solid Strand		0,5 ... 6 mm ²	1,5 ... 10 mm ²	16 ... 50 mm ²
Fine Strand,		0,5 ... 4 mm ²	2,5 ... 10 mm ²	16 ... 35 mm ²
AWG Conductor		20 ... 10	14 ... 6	4 ... 1
Dimensions				
	a	11,3	17,2	23,3
	b	15,6	15,6	18,2
	c	5,5	8,7	14,4

IBK type clamping yokes are designed with blue insulation Widths in order to indicate connection to the N-Lead. They Terminals can be used with DB 5 marking tag.

IBK 4
525 371



IBK 10
525 372



IBK 35
525 373



Electrical Ratings				
Cross-Section		4 mm ²	10 mm ²	35 mm ²
Insulation Stripping Length (min.-max.)		16 mm	19 mm	19 mm
Fixing Screw		M 3	M 4	M 6
Busbar Dimensions		10 x 3	10 x 3	10 x 3
Isolation Width		Blue	Blue	Blue
Torque		0,5 Nm	1,2 Nm	2,8 Nm
Qty.				
		100	100	50
Connection Data				
Solid Strand		0,5 ... 6 mm ²	1,5 ... 10 mm ²	16 ... 50 mm ²
Fine Strand,		0,5 ... 4 mm ²	2,5 ... 10 mm ²	16 ... 35 mm ²
AWG Conductor		20 ... 10	14 ... 6	4 ... 1
Dimensions				
	a	14,1	19,9	8,8
	b	18,8	18,8	31,7
	c	6,4	8,5	14,1