




Technical Specifications



Strain relief cable glands (compression)

Thread: Metric
Protection degree: IP68-10
Material: Parts A, C, E and F are made of Nylon PA66 approved by UL (Fire Grade 94V-0). Part B and D are made of EPDM weatherproof rubber.
Ambient temperature: Static state: -40°C...+100°C in static state, instantaneous heat resistance up to 120°C
 Dynamic: -20°C - +80°C in static state, instantaneous heat resistance up to 100°C.

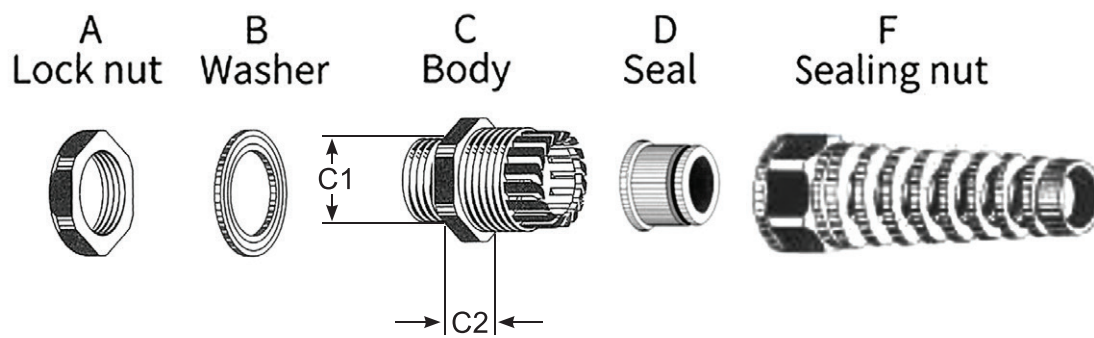

Strain relief cable glands

type	AG (mm)	colour	compress area (mm)	C1 (mm)	C2 (mm)	A & F (mm)
SRM12-P-7B	M16	black	4-7	8.5	12	18/19
SRM16-P-10B	M16	black	6-10	10	16	22/22
SRM20S-P-12B	M20	black	6-12.5	10	20	27/24

Part Number Breakdown (Metric)

SR	M	12	-	P	7	B
Model name	Metric	12	-	Strain relief	7	Black