


PVC INSULATED LIPPED BLADE TERMINALS

Feature:

1. Maximum Electrical Rating: 600 Volts
2. Maximum Temperature: 75

Specification:

WIRE RANGE AWG / mm ²	ITEM NO.	DIMENSIONS inch (mm)					
		B	L	F	E	D	d1
22~16 AWG 0.5~1.5 mm ²	LB1-3V	.118 (3.0)	1.102 (28.0)	.709 (18.0)	.394 (10.0)	.161 (4.1)	.067 (1.7)
	LB1-4.6V	.181 (4.6)					
16~14 AWG 1.5~2.5 mm ²	LB2-3V	.118 (3.0)	1.102 (28.0)	.709 (18.0)	.394 (10.0)	.177 (4.5)	.091 (2.3)
	LB2-4.6V	.181 (4.6)					
12~10 AWG 4~6 mm ²	LB5-3V	.118 (3.0)	1.181 (30.0)	.689 (17.5)	.492 (12.5)	.256 (6.5)	.134 (3.4)
	LB5-4.6V	.181 (4.6)					

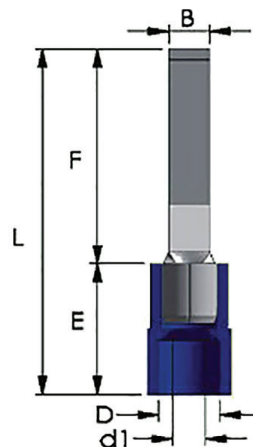

NYLON INSULATED LIPPED BLADE TERMINALS

Feature:

1. Maximum Electrical Rating: 600 Volts
2. Maximum Temperature: 105

Specification:

WIRE RANGE AWG / mm ²	ITEM NO.	DIMENSIONS inch (mm)					
		B	L	F	E	D	d1
22~16 AWG 0.5~1.5 mm ²	LB1-3A	.118 (3.0)	1.142 (29.0)	.709 (18.0)	.413 (11.0)	.161 (4.1)	.067 (1.7)
	LB1-4.6A	.181 (4.6)					
16~14 AWG 1.5~2.5 mm ²	LB2-3A	.118 (3.0)	1.142 (29.0)	.709 (18.0)	.433 (11.0)	.177 (4.5)	.091 (2.3)
	LB2-4.6A	.181 (4.6)					
12~10 AWG 4~6 mm ²	LB5-3A	.118 (3.0)	1.201 (30.5)	.689 (17.5)	.512 (13.0)	.256 (6.5)	.134 (3.4)
	LB5-4.6A	.181 (4.6)					