Staircase timer RS-TSL

☐ Features

- Microcontroller based
- Possibility of 3wire or 4wire connection
- ON, OFF, AUTO three operation modes.
- 1NO-16A contact
- LED indication for power supply and relay status
- 1 Module Din-rail mounting

☐ Technical data

Supply voltage	AC 220-240V
Rated frequency	50/60Hz
Time range	0.5-20min
Setting accuracy	<5%
Output contacts	1NO
Current rating	16A/AC1
Insulation voltage	250V
Protection degree	IP20
Pollution degree	3
Electrical life	10^5
Mechanical life	10^6
Altitude	≤2000m
Ambient temperature	-5°C~+40°C
Storage temperature	-10°C~+50°C
Wire size	0.5mm²~2.5mm²
Torque	0.5Nm
Mounting	TH-35 DIN-Rail

☐ Front-face panel

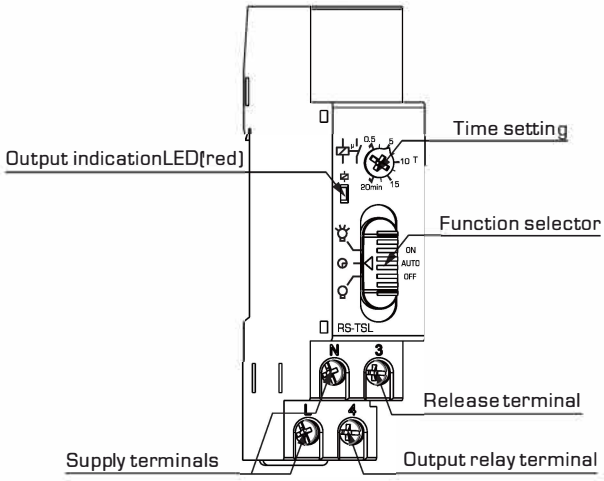

☐ Function diagram

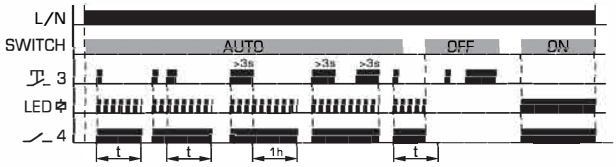

☐ Wiring diagram

3 wire connection

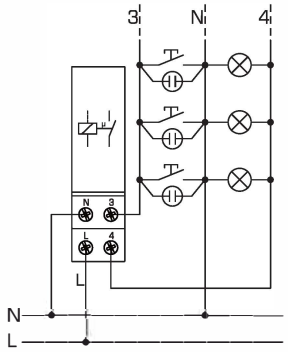
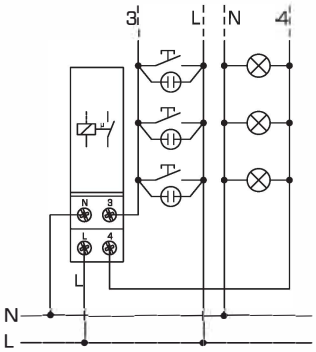
4 wire connection