SM1X3141P

RIGID SM1 BREAKER-CONTACTOR CONNECTION. FOR MOTOR PROTECTION BREAKER SM1P... WITH BF09...25A CONTACTORS

Product designation			Rigid SM1 breaker-contactor connections
Product type designation			SM1X
Description			Rigid SM1P breaker - BF09..25A contactor connections.
Accessories for			SM1P…
Operational characteristics			
IEC maximum current (Imax)		A	25
Mechanical features			
Operating position			
	normal		Other
Weight		g	35
Dimensions			

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

SM1X3141P

RIGID SM1 BREAKER-CONTACTOR CONNECTION. FOR MOTOR PROTECTION BREAKER SM1P... WITH BF09...25A CONTACTORS

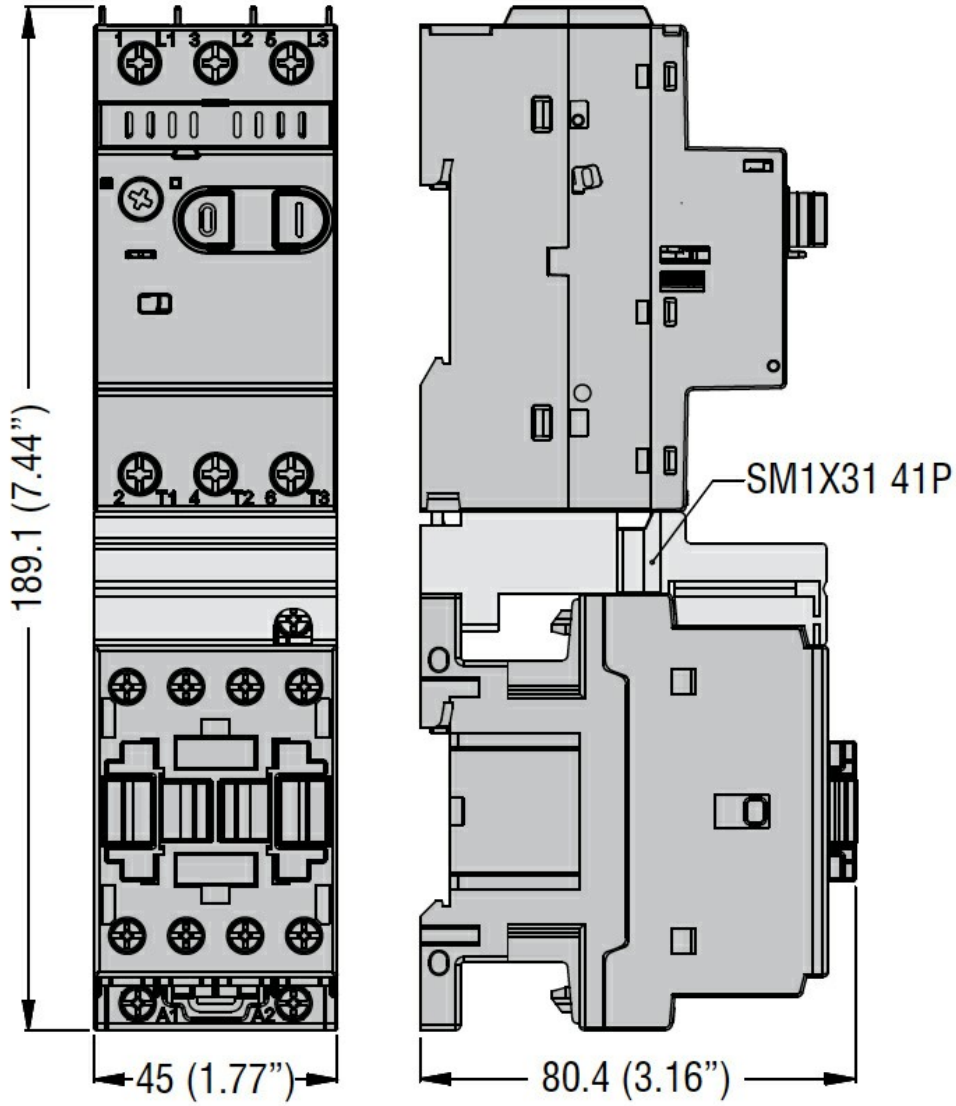

Certifications and compliance

Compliance

	CSA C22.2 n° 14
	IEC/EN 60947-1
	IEC/EN 60947-5-1
	UL508

Certificates

	cULus
	EAC

ETIM classification

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding