EXS1063

63A SINGLE-PHASE ELECTRONIC CURRENT TRANSFORMER WITH RJ45 CABLE, 2M LONG

Product designation			Electronic current transformers for EASY BRANCH system
Product type designation			EXS1063
Type			single-phase
Current inputs			
Rated current (Ie)		A	63
Current			
IEC maximum (Imax)		A	63
IEC rated (Iref-lb)		A	10
IEC start (Ist)		mA	20
Insulations			
Rated insulation voltage Ui IEC/EN		V	600
Mechanical features			
Housing type			Polyamide
Terminals type			RJ45
Weight		g	120
Ambient conditions			
Temperature			
	Operating temperature		
	min	°C	-30
	max	°C	+70
	Storage temperature		
	min	°C	-30
	max	°C	+80
Relative humidity		%	<80
Maximum Pollution degree			2
Overvoltage category			3
Protection degree			IP20

Dimensions

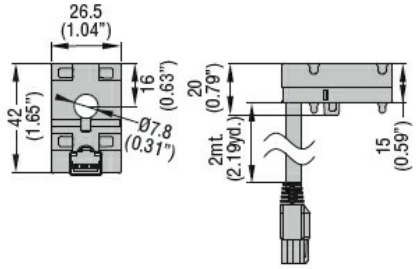

Certifications and compliance

Compliance		
	IEC/EN/BS 61000-6-2	
	IEC/EN/BS 61000-6-4	
	IEC/EN/BS 61010-1	
Certificates		

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

CE
cETLus
EAC
UKCA

ETIM classification

ETIM 8.0	EC002475 - Current value transformer

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding