GAX61

DOOR-COUPLING HANDLE, PADLOCKABLE. RED/YELLOW, ROTATING, FOR GA...A, GA063SA, GA...C AND GA...D. SCREW FIXING. RECESSED SELECTOR. 5MM/0.2". IEC IP65/UL TYPE 4X

Product designation			Handles for switch disconnector
Product type designation			GAX6
Mechanical features			
Weight		g	73
UL technical data			
UL Standard			UL60947-4-1
Ambient conditions			
Operating temperature			
	min	°C	-25
	max	°C	+55
Storage temperature			
	min	°C	-40
	max	°C	+70
Max altitude		m	3000
Resistance & Protection			
Frontal IP degree			IP65
Pollution degree			3
Dimensions			



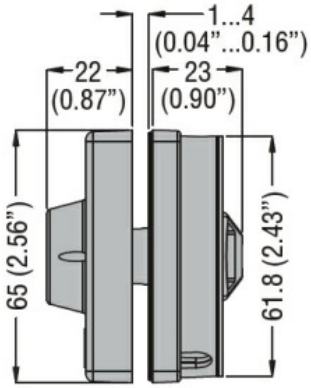

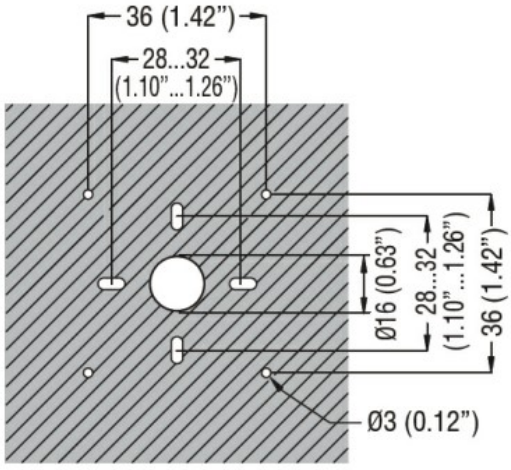

Certifications and compliance

Compliance	
	CSA C22.2
	IEC/EN 60947-1
	IEC/EN 60947-3
	UL508
	UL98
Certifications	
	cULus according to UL508 /CSA C22.2 n°14
	cULus according to UL98 / CSA C22.2 n°4
	EAC

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

ETIM classification

ETIM 8.0	EC000230 - Door coupling handle for switchgear

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding