LPCQ103

PUSH-PUSH BUTTON ACTUATOR Ø22MM PLATINUM SERIES CHROMED PLASTIC, FLUSH. PUSH ON-PUSH OFF, GREEN

Product designation			Push-push button actuators
Product type designation			LPCQ10
General characteristics			
Colour			Green
Type of positions			Flush pushbutton. Push on-push off
Material			Polyamide
IEC degree of protection			IP66, IP67 and IP69K
Mechanical features			
Operating force		kg-lb	<0.5Kg / 1.1lb
Mechanical life - Push-Push actuators		cycles	500000
Fixing			Without mounting adapter
Mounting adapter			LPXC10A (1EM) / LPXC01 (1NC)
Weight		g	25
UL technical data			
UL degree of protection			Type1, 2, 3R, 4, 4X, 12, 12K
Ambient conditions			
Temperature			
	Operating temperature		
	min	°C	-25
	max	°C	+70
	Storage temperature		
	min	°C	-40
	max	°C	+85

Dimensions

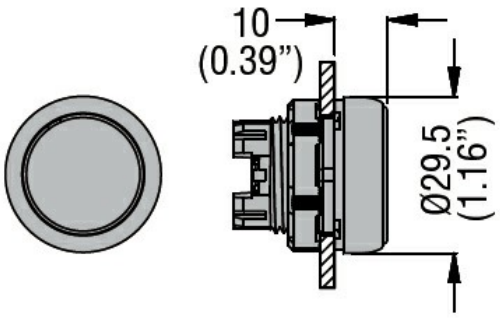

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

	UL508
Certificates	
	CCC
	cULus
	EAC
	RINA

ETIM classification

ETIM 8.0	EC000221 - Front element for push button

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding