SM1Z1705P

FLUSH MOUNT ENCLOSURE IP65 (4X) FOR SM1P... WIDTH 87MM

Product designation				Flush mount enclosure IP65 (4X) for SM1P
Product type designation				SM1Z
Description				Flush mount enclosures IP65 for SM1P (UL type 4X)
Accessories for				SM1P…
Mechanical features				
Weight			g	205
Operations				
Mechanical life			cycles	100000
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+60
	Storage temperature			
		min	°C	-50
		max	°C	+80
IEC degree of protection				IP65
UL degree of protection				4X (front)
Dimensions				

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

SM1Z1705P

FLUSH MOUNT ENCLOSURE IP65 (4X) FOR SM1P... WIDTH 87MM

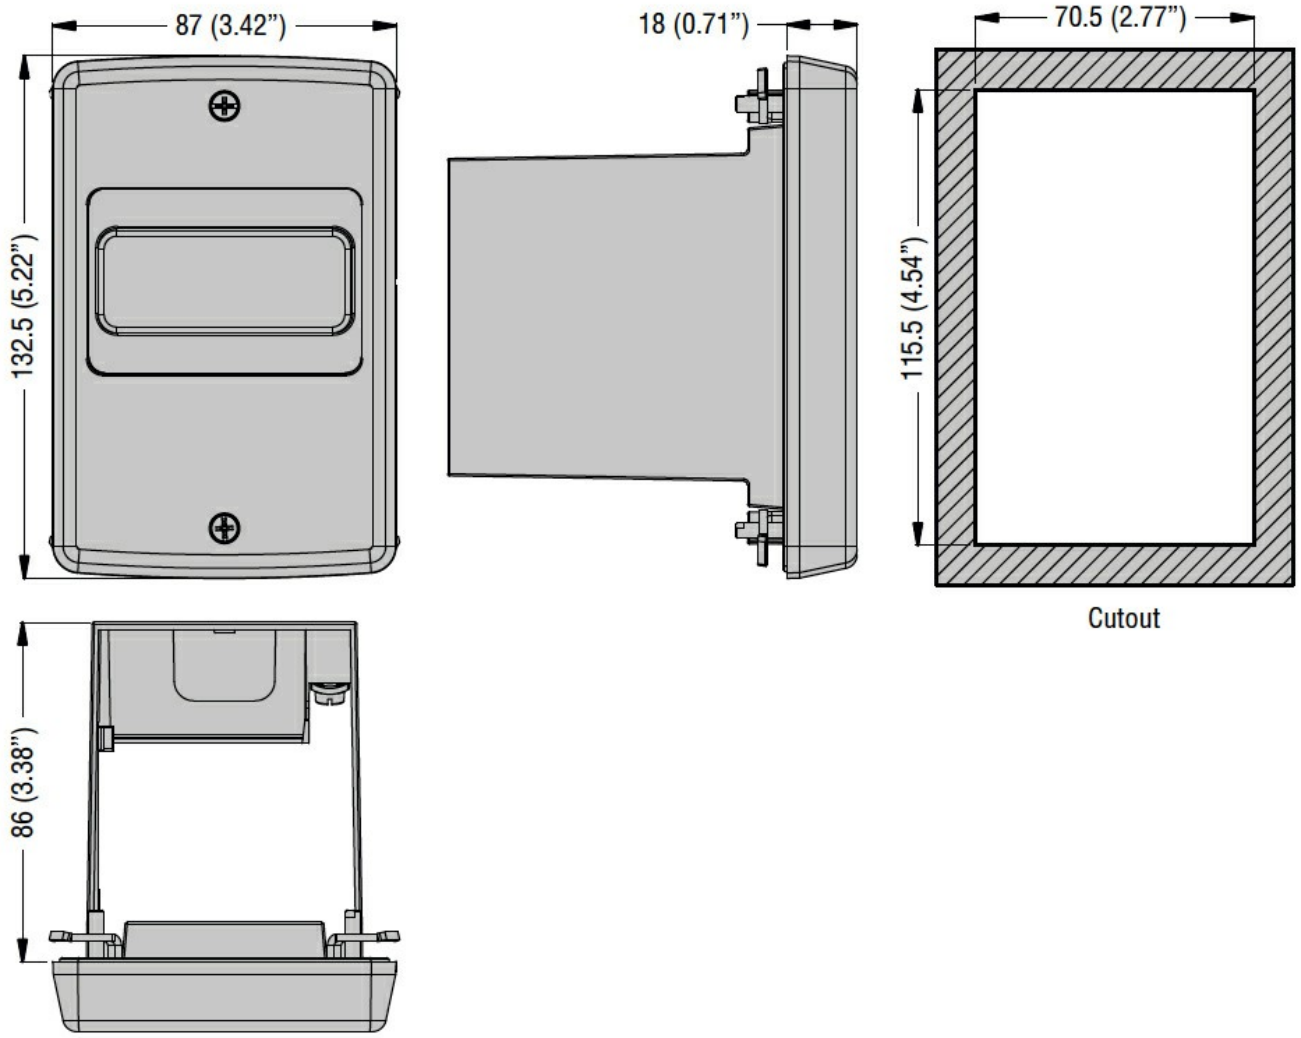

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

Certificates

cULus
EAC

ETIM classification

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding