LPL4

PILOT LIGHT HEAD Ø22MM PLATINUM SERIES CHROMED PLASTIC, RED. WITHOUT MOUNTING ADAPTER

Product designation			Pilot light head
Product type designation			LPL
General characteristics			
Colour			Red
Material			Polyamide
IEC degree of protection			IP66, IP67 and IP69K
Mechanical features			
Mounting adapter			LPXAU120
Weight		g	24
UL technical data			
UL degree of protection			Type1, 2, 3R, 4, 4X, 12, 12K
Ambient conditions			
Temperature			
	Operating temperature		
	min	°C	-25
	max	°C	+70
	Storage temperature		
	min	°C	-40
	max	°C	+85

Dimensions

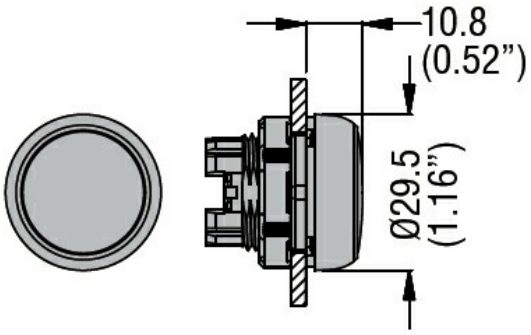

Certifications and compliance

Compliance

- CSA C22.2 n° 14
- IEC/EN/BS 60947-1
- IEC/EN/BS 60947-5-1
- UL508

Certificates

- CCC
- cULus
- EAC
- RINA

ETIM classification

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

ETIM 8.0

EC002024 - Accessories/spare parts for command devices

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding