Lovato electric
ENERGY AND AUTOMATION

11G350

FASTON TERMINALS. AUXILIARY CONTACTS FOR SIDE MOUNTING, FOR B… SERIES CONTACTORS, 2NO+1NC OR 1NO+2NC REVERSIBLE (SPST EA)

Product designation			Auxiliary contact
Product type designation			G350
Contact characteristics			
Number of poles		Nr.	4
Rated insulation voltage Ui IEC/EN		V	690
IEC Conventional free air thermal current Ith		A	10
Mechanical features			
Operating position			
	normal		On vertical plane
	allowable		Any
Fixing			Side mounting
Weight		g	82
Auxiliary contact characteristics			
Type of contact			2NO+1NC or 1NO+2NC reversible
Thermal current Ith		A	10
IEC/EN 60947-5-1 designation			A600 - P600
Operating current AC15			
	230V	A	3
	400V	A	1.9
	500V	A	1.4
Electrical characteristics			
Conductivity			5V 10 mA
UL/CSA and IEC/EN 60947-5-1 designation			A600 P600
Operating current AC15			
	120V	A	6
	240V	A	3
	480V	A	1.5
UL technical data			
Rated operational voltage AC (UL)		V	600
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-50
	max	°C	+70
Storage temperature			
	min	°C	-60
	max	°C	+80
Max altitude		m	3000
Dimensions			

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

11G350

FASTON TERMINALS. AUXILIARY CONTACTS FOR SIDE MOUNTING, FOR B… SERIES CONTACTORS, 2NO+1NC OR 1NO+2NC REVERSIBLE (SPST EA)

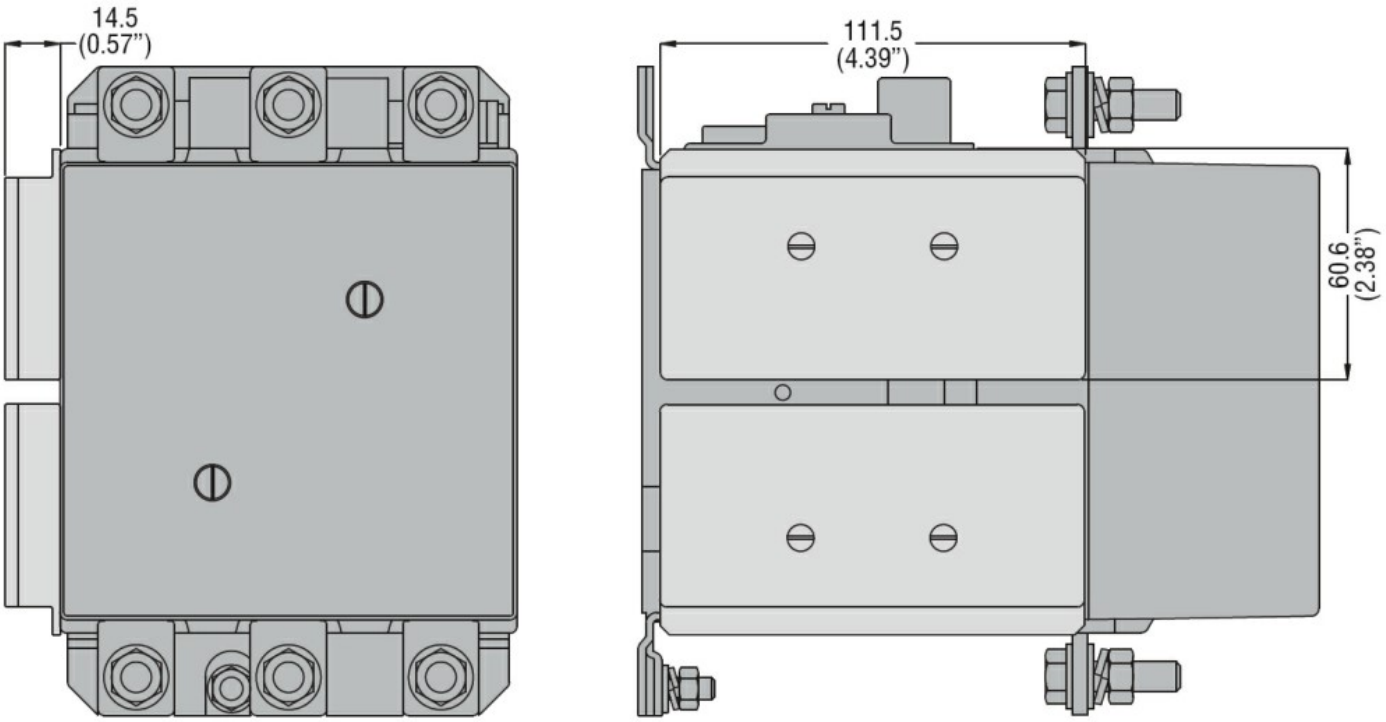

Wiring diagrams

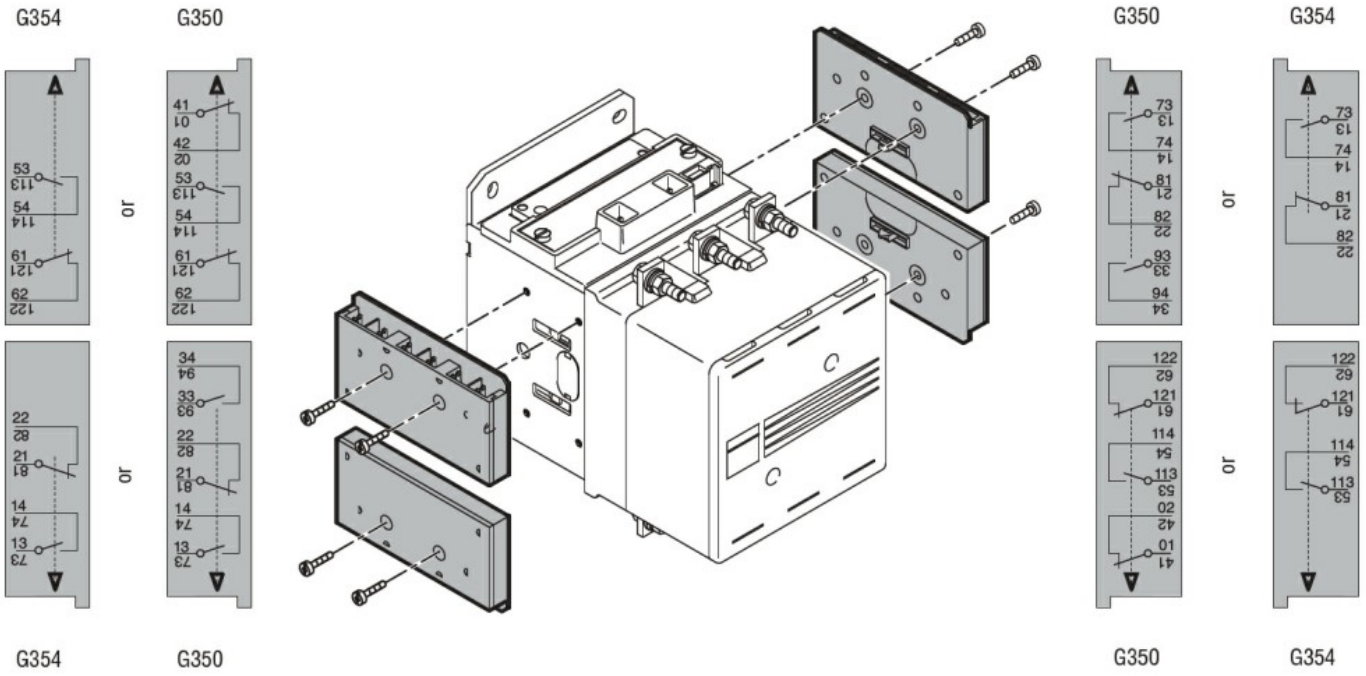

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1
CSA C22.2 n° 60947-5-1
IEC/EN 60947-1
IEC/EN 60947-5-1
UL 60947-1
UL 60947-5-1

Certificates

CCC
cULus
EAC

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

UR

ETIM classification

ETIM 8.0	EC000041 - Auxiliary contact block

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding