# BFX5301

MECHANICAL INTERLOCK, SIDE MOUNT WITH 2NC CONTACTS FOR BF40...BF94A/E

## UL technical data

| | | |
|---|---|---|
| Rated operational voltage AC (UL) | V | 600 |

## Dimensions

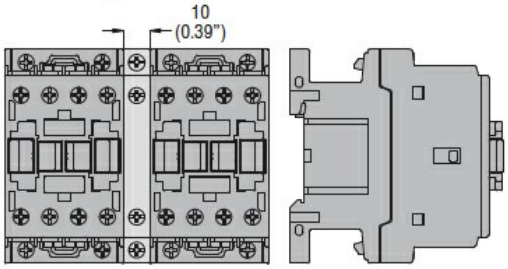


## Wiring diagrams

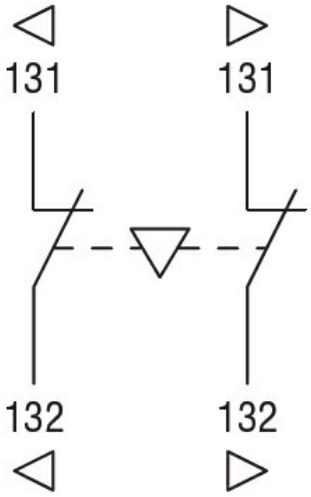


## Certifications and compliance

Compliance

| |
|---|
| CSA C22.2 n° 60947-1 |
| CSA C22.2 n° 60947-4-1 |
| CSA C22.2 n° 60947-5-1 |
| IEC/EN 60947-1 |
| IEC/EN 60947-4-1 |
| IEC/EN 60947-5-1 |
| UL 60947-1 |
| UL 60947-4-1 |
| UL 60947-5-1 |

Certificates

cULus

## ETIM classification

| | |
|---|---|
| ETIM 8.0 | EC001044 - Mechanic interlock for switch |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding