Fire rated enclosed
Switch-disconnectors 20÷160A

20A-32A-40A
2P-3P-3P+N

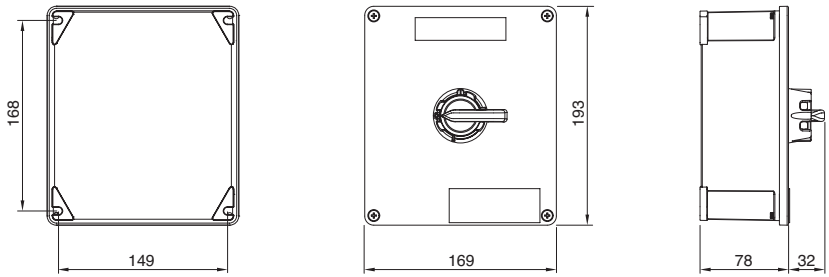

20A-32A-40A
6P
63A-80A-100A
2P-3P-3P+N

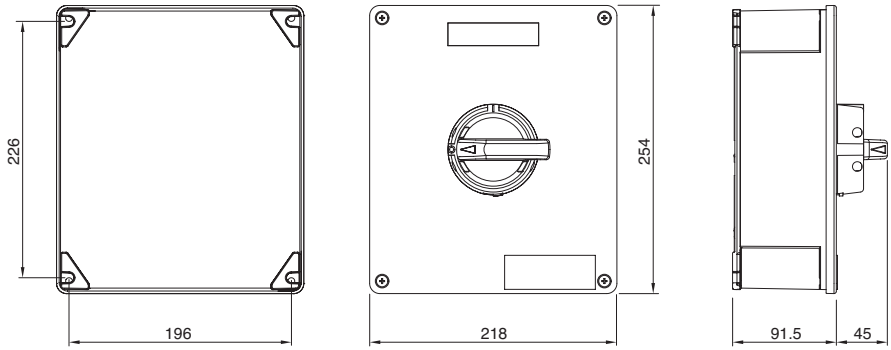

(dimension mm)

ISOLATORS Series

63A-80A-100A
6P

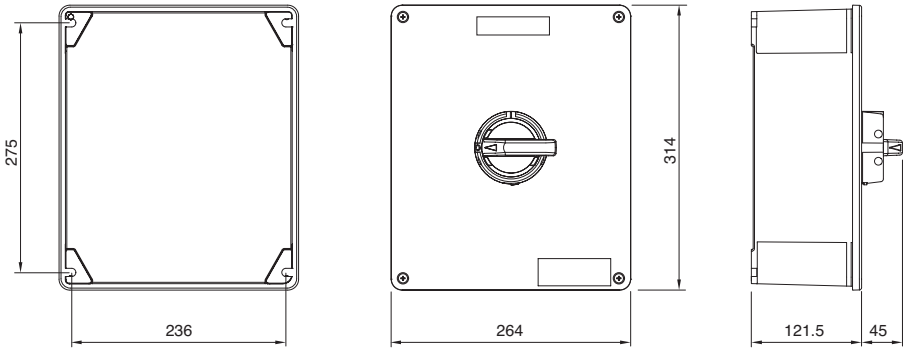

125A-160A
3P-3P+N

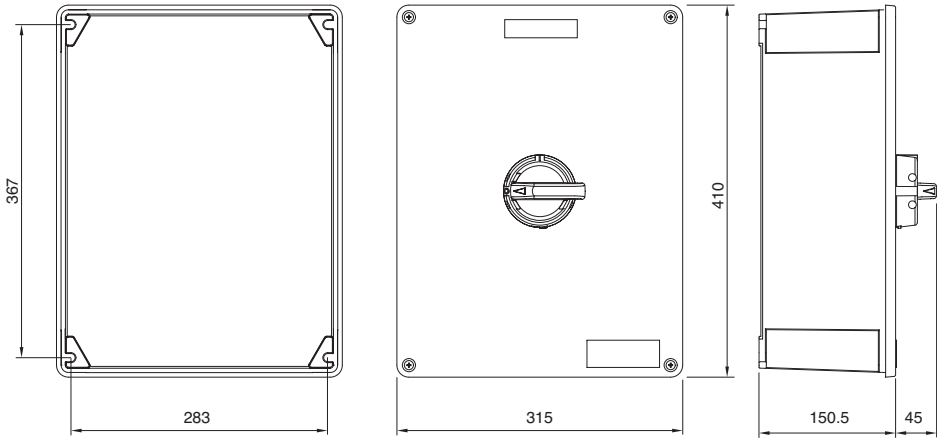

(dimension mm)

160A
6P

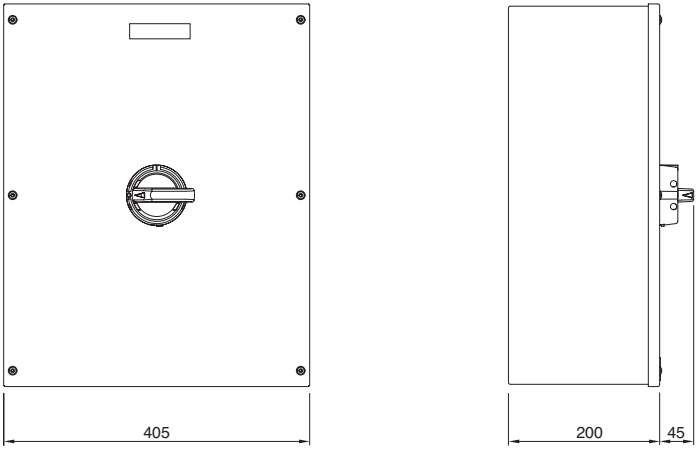

		20A-32A-40A 2P-3P-3P+N-6P	63A-80A-100A 2P-3P-3P+N-6P	125A-160A 3P-3P+N-6P
Wire range		1.5÷16mm²	10-50mm²	10-70mm²
Tightening torque	Poles terminals	2Nm	3.5Nm	6Nm
	Earth terminals	1.2Nm	3.5Nm	3.5Nm
Wire strip length		10mm	13mm	15mm



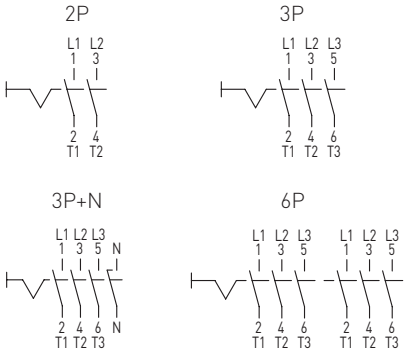

ATTENTION

When mounting or removing additional elements the switch
has to be in OFF position for avoiding damages to mechanism.
When removing main switch following istruction for avoiding damages.

(dimension mm)

20A-32A-40A
2P-3P-3P+N



OFF Position



ON Position



63A-80A-100A
2P-3P-3P+N
125A-160A
3P-3P+N



OFF Position





ON Position







Numero verde
800-018009
www.scame.com
infotech@scame.com